JC05 Rec'd PCT/PTO 20 MAR 2002

FORM PTO-1390 REV. 5-93 US DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE **TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371**		ATTORNEYS DOCKET NUMBER P02,0071 U.S.APPLICATION NO. (if known, see 37 CFR 1.5) 10/088668
INTERNATIONAL APPLICATION NO. PCT/DE00/03256	INTERNATIONAL FILING DATE 19 September 2000	PRIORITY DATE CLAIMED 21 September 1999

TITLE OF INVENTION "OPTICAL TRANSMISSION SYSTEM WITH DISPERSION COMPENSATION UNITS"

APPLICANT(S) FOR DO/EO/US Andreas Faerbert and Christian Scheerer

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay.
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.

5. ☒ A copy of International Application as filed (35 U.S.C. 371(c)(2))
   a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
   b. ☐ has been transmitted by the International Bureau.
   c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2).

7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. §371(c)(3))
   a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
   b. ☐ have been transmitted by the International Bureau.
   c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
   d. ☒ have not been made and will not be made.

8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).

9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).

10. ☒ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern other document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 C.F.R. 1.97 and 1.98; **(PTO 1449, Prior Art, Search Report)**.

12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 C.F.R. 3.28 and 3.31 is included.
    (SEE ATTACHED ENVELOPE)

13. ☒ A FIRST preliminary amendment.
    ☐ A SECOND or SUBSEQUENT preliminary amendment.

14. ☒ A substitute specification.

15. ☐ A change of power of attorney and/or address letter.

16. ☒ Other items or information:
    a. ☒ Submission of Drawings - 3 sheets
    b. ☒ EXPRESS MAIL #EL843745900US dated March 20, 2002

JC13 Rec'd PCT/PTO 20 MAR 2002

U.S. APPLICATION NO. (if known, see 37 C.F.R. 1.5) 10/088668	INTERNATIONAL APPLICATION NO. PCT/DE00/03256	ATTORNEY'S DOCKET NUMBER P02,0071

17. ☒ The following fees are submitted:				CALCULATIONS	PTO USE ONLY
BASIC NATIONAL FEE (37 C.F.R. 1.492(a)(1)-(5): Search Report has been prepared by the EPO or JPO .... $890.00 International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) ... $670.00 No international preliminary examination fee paid to USPTO (37 C.F.R. 1.482) but international search fee paid to USPTO (37 C.F.R. 1.445(a)(2) .... $760.00 Neither international preliminary examination fee (37 C.F.R. 1.482) nor international search fee (37 C.F.R. 1.445(a)(2) paid to USPTO .... $970.00 International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) .... $ 96.00					
ENTER APPROPRIATE BASIC FEE AMOUNT =				$ 890.00	
Surcharge of $130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 C.F.R. 1.492(e)).				$	
Claims	Number Filed	Number Extra	Rate		
Total Claims	13 - 20 =	0	X $18.00	$	
Independent Claims	1 - 3 =	0	X $84.00	$	
Multiple Dependent Claims			$280.00 +	$	
TOTAL OF ABOVE CALCULATIONS =				$ 890.00	
Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be filed. (Note 37 C.F.R. 1.9, 1.27, 1.28)				$	
SUBTOTAL =				$ 890.00	
Processing fee of $130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492(f)). +				$	
TOTAL NATIONAL FEE =				$ 890.00	
Fee for recording the enclosed assignment (37 C.F.R. 1.21(h). The assignment must be accompanied by an appropriate cover sheet (37 C.F.R. 3.28, 3.31). $40.00 per property +				**SEE ATTACHED ENVELOPE**	
TOTAL FEES ENCLOSED =				$ 890.00	
				Amount to be refunded	$
				charged	$

a. ☒ A check in the amount of $890.00 to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. __________ in the amount of $ _______ to cover the above fees. A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. **501519**. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 C.F.R. 1.494 or 1.495 has not been met, a petition to revive (37 C.F.R. 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Schiff Hardin & Waite
Patent Department
6600 Sears Tower
Chicago, Illinois 60606-6473
Customer Number 26574

James D. Hobart
SIGNATURE

James D. Hobart
NAME

24,149
Registration Number

IN THE UNITED STATES ELECTED OFFICE OF THE UNITED STATES PATENT AND TRADEMARK OFFICE UNDER THE PATENT COOPERATION TREATY - CHAPTER II

PRELIMINARY AMENDMENT

APPLICANT: Andreas Faerbert and Christian Scheerer

ATTORNEY DOCKET NO.: P02,0071

SERIAL NO.: EXAMINER:

FILING DATE: ART UNIT:

INTERNATIONAL APPLICATION NO.: PCT/DE00/03256

INTERNATIONAL FILING DATE: 19 September 2000

INVENTION: "OPTICAL TRANSMISSION SYSTEM WITH DISPERSION COMPENSATION UNITS"

BOX PCT
Assistant Commissioner for Patents
Washington, D.C. 20231

SIR:

Please amend the above-identified International Application before entry into the National Stage before the U.S. Patent and Trademark Office under 35 USC 371 as follows:

IN THE SPECIFICATION:

Please replace Amended Sheets 1-5 of the translation of the appendix, pages 6-13 of the translation of the PCT Application and Amended Sheet 14 with the attached Substitute Specification.

IN THE ABSTRACT OF THE DISCLOSURE:

Please replace page 16 of the translation with the attached unnumbered page containing an Abstract of the Disclosure.

IN THE CLAIMS:

Please cancel claims 1-6 on Amended Sheets 14 and 15, without prejudice, and add the following claims:

--7. (New) An optical transmission system comprising a fixed number of optical fiber line sections of virtually the same length with each section including an optical fiber and a dispersion compensation unit, each dispersion compensation unit having virtually the same compensation value, which is determined starting from dispersions selected from a calculated accumulated residual dispersion and an estimated accumulated residual dispersion for an at least virtually uniformly distributed undercompensation of the fiber dispersion of the fixed number of optical fiber line sections.--

--8. (New) An optical transmission system according to claim 7, wherein the dispersion compensation units are provided for compensating the fiber dispersion of all the optical fiber line sections.--

--9. (New) An optical transmission system according to claim 8, wherein a fiber line section having an optical fiber and a dispersion compensation unit implements an optical transmission module.--

--10. (New) An optical transmission system according to claim 9, wherein the optical transmission system can be formed from a plurality of optical transmission modules arranged in series.--

--11. (New) An optical transmission system according to claim 10, wherein the optical fibers of the fiber line sections have a minimum length of 20 kilometers.--

--12. (New) An optical transmission system according to claim 11, wherein a bidirectional data transmission can be implemented via the fiber line sections.--

--13. (New) An optical transmission system according to claim 7, wherein a fiber line section having an optical fiber and a dispersion compensation unit forms an optical transmission module.--

--14. (New) An optical transmission system according to claim 13, wherein the optical transmission system can be formed from a plurality of optical transmission modules arranged in series.--

--15. (New) An optical transmission system according to claim 14, wherein the optical fibers of the fiber line sections have a minimum length of 20 kilometers.--

--16. (New) An optical transmission system according to claim 15, wherein a bidirectional data transmission can be implemented via the fiber line sections.--

--17. (New) An optical transmission system according to claim 7, wherein a bidirectional data transmission can be implemented via the fiber line sections.--

--18. (New) An optical transmission system according to claim 7, wherein the optical fibers of the fiber line sections have a minimum length of 20 kilometers.--

--19. (New) An optical transmission system according to claim 18, wherein a bidirectional data transmission can be implemented via the fiber line sections.--

REMARKS

Claims 7-19 are presented for examination.

By this amendment, the translation of the specification has been amended to insert headings, to correct grammatical and typographical errors and, in particular, to add portions of the original page 5 of the PCT Application, which was inadvertently not included with the amended sheets attached to the Preliminary Examination Report of January 21, 2002. These amendments are incorporated in the attached Substitute Specification. A marked-up version is attached herewith as an Appendix showing the changes which are being requested.

The Abstract of the Disclosure has been replaced by the attached unnumbered page containing an Abstract of the Disclosure. This Abstract has been revised to overcome any possibilities of reciting claim-type terminology. A marked-up version of the original Abstract of the Disclosure is also attached in the Appendix.

Claims 1-6 from the annex have been cancelled, without prejudice, and new claims 7-19, which are basically claims 1-6 which have been drafted to place them in form for examination in the United States Patent Office and to remove multiple-

dependency, have been added. It is respectfully submitted that the claims are patentable over the references of record and are allowable.

Respectfully submitted,

(Reg. No. 24,149)

James D. Hobart
SCHIFF HARDIN & WAITE
Patent Department
6600 Sears Tower
233 South Wacker Drive
Chicago, Illinois 60606
Telephone: (312) 258-5781
Customer Number 26574

DATED: March 20, 2002

ABSTRACT OF THE DISCLOSURE

An optical transmission system has a plurality of optical fiber line sections with each section including an optical fiber and a dispersion compensation unit. The dispersion compensation units are provided to compensate for the fiber dispersion (d) of a plurality of fiber line sections in such a way that the remaining residual dispersion per compensated fiber line section occurs at least virtually uniformly by the same absolute-magnitude dispersion (ΔD).

TITLE

"OPTICAL TRANSMISSION SYSTEM"

BACKGROUND OF THE INVENTION

The invention relates to an optical transmission system comprising a fixed number of optical fiber line sections of virtually the same length with each section including an optical fiber and a dispersion compensation unit.

Owing to the chromatic dispersion occurring during the transmission of optical signals over optical fibers, and to the self-phase modulation (SPM), distortions are caused in the optical data signal to be transmitted in the case of all optical transmission systems with high data throughput rates, and also in the case of transmission systems operating using the WDM (Wavelength-Division Multiplexing) principle. In this regard, please see Grau and Freude: "Optische Nachrichtentechnik - Eine Einführung" ["Optical communications - an introduction"], Springer-Verlag, 3rd Edition, 1991, pages 120-126.

Such distortions in the optical data signal to be transmitted are functions, inter alia, of the input power of the optical data signal. Moreover, such distortions determine the regeneration-free transmission range of an optical transmission system, that is to say the optical transmission link over which an optical data signal can be transmitted without the need to carry out a regeneration or "3R generation" (electronic data regeneration with regard to the amplitude, edge and the clock pulse of an optically transmitted, digital data signal or data stream).

In order to compensate such distortions in the optical data signal, a provision is made for suitable dispersion compensation units during the transmission of optical signals via optical standard monomode fibers, or use is made of a dispersion management adapted to the optical transmission link. For this purpose, such optical transmission systems are subdivided chiefly into a plurality of optical fiber line sections in which the fiber dispersion respectively caused in the optical fiber line section is completely or partially compensated with the aid of a dispersion compensation unit.

Such dispersion compensation units are configured, for example, as optical special fibers in the case of which the dispersion or fiber dispersion assumes very high negative values particularly in the 1550 nm window owing to a special selection of the refractive index profile in the fiber core and the surrounding cladding layers of the optical fiber. The dispersion contributions generated by the optical transmission fibers can be effectively compensated with the aid of the high negative dispersion values caused by the dispersion-compensating fiber. In addition, the maximum number of optical fiber line sections or the regeneration-free range of the optical transmission system is determined by the eye diagram (eye-opening) of the optical data signal present at the output of the respective optical fiber line section. This results in a maximum range for a regeneration-free transmission of an optical data signal, which is determined in addition by the optical signal-to-noise ratio of the transmission medium.

In optical transmission systems implemented to date, various dispersion management concepts are pursued for this purpose, the optimum dispersion compensation of an optical transmission link being carried out by using pre- and/or

post-compensated optical fiber line sections or differently over- or under-compensated ones. It is therefore possible to transmit over a specific distance without regeneration depending on the fiber dispersion.

It is known in this regard from DER FERMELDE-INGENIEUR: "Wellenlängenmultiplextechnik in zukünftigen photonischen Netzen" ["Wavelength division multiplex technology in future photonic networks"], A. Ehrhardt et al., 53rd Volume, Issues 5 and 6, May/June 1999, pages 18-24 that the system optimum for dispersion compensation of an optical transmission system can be reached for a dispersion compensation of less than 100%. It also emerges from the above-named printed publication that the chromatic fiber dispersion can be compensated to a specific proportion by fiber nonlinearities themselves.

Also known from the publication "320-Gb/s (32*10 Gb/s WDM) Transmission Over 500 km of Conventional Single-Mode Fiber with 125-km Amplifier Spacing" by Bigo et al., IEEE Photonics Technology Letters, Vol. 10, No. 7, July 1998 is an optical transmission system that comprises a plurality of optical fiber line sections of virtually the same length with in each case an optical fiber (SMF) and a dispersion compensating fiber (DCF). In order to increase the transmission range of 32 optical 10 Gb/s signals, a specific dispersion overcompensation is carried out at the start of the optical transmission link, and in each case a dispersion overcompensation is carried out at the end in each case of an optical fiber line section with the aid of dispersion compensating fibers.

SUMMARY OF THE INVENTION

The object of the present invention is thus to configure an optical transmission system of the type mentioned at the beginning in such a way that the dispersion compensation is improved and/or the transmission range reduced by the signal distortions and capable of being bridged without regeneration is increased.

According to the invention, the object is achieved by means of an optical transmission system having a fixed number of optical fiber line sections of virtually the same length with each section having an optical fiber and a dispersion compensation unit with the dispersion compensation units having virtually the same compensation values, which are determined starting from a calculated or estimated accumulated residual dispersion for the at least virtually uniformly distributed undercompensation of the fiber dispersion of the fixed number of optical fiber line sections. By comparison with previous systems with full compensation, the virtually uniformly distributed under compensation according to the invention over the individual optical fiber line sections advantageously permits a virtual doubling of the transmission range that can be bridged without regeneration, that is to say under compensation is performed in the respective fiber line sections to such an extent that the remaining residual dispersion corresponds to a multiple of the absolute-magnitude dispersion according to the invention, and that the residual dispersion along the optical transmission link increases per fiber line section by the absolute-magnitude dispersion in each case.

According to a further refinement of the invention, the optical transmission system has an accumulated residual dispersion that is caused by fiber nonlinearities and the fiber dispersion and decreases virtually linearly with increasing data rate. The

non linear effect of self-phase modulation and the group velocity dispersion (GVD) are the cause of the accumulated residual dispersion at the end of the last fiber line section of the optical transmission link. In the case of fully compensated fiber line sections, they are virtually independent of the input power of the optical data signal, and influence one another mutually, that is to say the self-phase modulation can have a dispersion-compensating effect. Moreover, the group velocity dispersion in the optical fibers increases with increasing data rate, while the self-phase modulation remains virtually unchanged. Consequently, the self-phase modulation (SPM) in the optical transmission system contributes to the dispersion compensation with the dispersion compensating effect of the self-phase modulation (SPM) becoming less with increasing data rate with regard to the group velocity dispersion, that is to say the accumulated residual dispersion decreases with increasing data rate.

In accordance with a further refinement of the invention, the dispersion compensation units are provided for compensating the fiber dispersion of all the optical fiber line sections. The maximum transmission range that can be bridged without regeneration can be implemented, if the residual dispersion advantageously increases in each case virtually uniformly by the same dispersion contribution in all the fiber line sections of the optical transmission system.

All the optical fiber line sections are the optical transmission are advantageously of virtually the same length, the optical fibers of the fiber line section additionally having a minimum length of 20 km. In the case of a minimum length of approximately 20 kilo meters, the signal distortions caused by the fiber dispersion and the fiber non linearities are virtually at their maximum value. Owing to the splitting of the optical transmission system to optical fiber line sections of virtually

the same length and whose number is determined by the optical transmission link to be bridged without regeneration and by the accumulated residual dispersion, an optical transmission system that is optimized with regard to the dispersion compensation and the transmission range that can be bridged without regeneration can be implemented by means of a simple modular design. In particular, the optical transmission system can especially advantageously be implemented a bidirectional data transmission over the fiber line sections owing to the symmetrical design being produced.

Advantageous developments and refinements of the optical transmission system according to the invention are described in the further patent claims.

The invention is to be explained in more detail below with the aid of a block diagram and two graphs.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows the principle design of an optical transmission system,

Figure 2 shows a graph of the dispersion management scheme according to the invention, and

Figure 3 shows, in a further graph, the number of the compensated fiber spans or fiber line sections that can be bridged without regeneration, as a function of the distribution of under- or over-compensation.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 1 is a schematic of an optical transmission system OTS that has an optical transmitter TU and an optical receiver RU. The optical transmitter TU is connected via N optical fiber line sections FDS_1 to FDS_N, each having an input I and an output E, to the optical receiver RU, which in each case have an optical amplifier EDFA, an optical fiber SSMF and an optical dispersion compensation unit DCU.

A first and Nth optical fiber line section FDS_1, FDS_N are illustrated in Figure 1 by way of example, a second to N-1th fiber line section FDS_2 to FDS_{N-1} being indicated with the aid of a dotted line. Moreover, the first optical fiber line section FDS_1 comprises a first optical amplifier $EDFA_1$, a first optical fiber $SSMF_1$, for example an optical standard single mode fiber, and a first optical dispersion compensation unit DCU_1, it being possible also to provide an optical preamplifier - not illustrated in Figure 1 - between the first optical fiber $SSMF_1$ and the first optical dispersion compensation unit DCU_1. Similarly, the Nth optical fiber line section FDS_N has an Nth optical amplifier $EFDA_N$, an Nth optical fiber $SSMF_N$ and an Nth optical dispersion compensation unit DCU_N. In a similar way, it is also possible here to provide a further optical preamplifier - not illustrated in Figure 1 - between the Nth optical fiber $SSMF_N$ and the Nth optical dispersion compensation unit DCU_N.

The optical data signal of the optical data stream OS is transferred by the optical transmitter TU to the input I of the first optical fiber line section FDS_1. Inside the first optical fiber line section FDS_1, the optical data signal OS is amplified with the aid of the first optical amplifier $EDFA_1$ and transmitted to the first dispersion compensation unit DCU_1 via the first optical fiber $SSMF_1$. The signal distortions in the optical data signal OS caused by the optical transmission over the first optical

fiber $SSMF_1$ are compensated in the first dispersion compensation unit DCU_1 except for a first residual dispersion D_{rest1}, which corresponds to the absolute-magnitude dispersion ΔD according to the invention in the case of the first dispersion compensation unit DCU_1. The fixed residual dispersion D_{rest} is a fraction, fixed by the number N of the optical fiber line sections FDS, of the accumulated residual dispersion D_{akk}, which rises virtually uniformly with each compensated fiber line section FDS by virtually the same absolute-magnitude dispersion ΔD.

The accumulated residual dispersion D_{akk} is caused by the fiber nonlinearities and the fiber dispersion, and is present at the end of the Nth fiber line section FDS_N. Moreover, the accumulated residual dispersion D_{akk} is not compensated at the end of the Nth fiber line section FDS_N because of the parameters, required for recovering the data from the optical data signal OS, for the eye diagram or "eye opening". The optical data signal OS present at the output E of the first optical fiber line section FDS_1 is therefore not completely compensated for dispersion, but undercompensated.

In a similar way to this, the optical data signal OS is transmitted over the further optical fiber line sections FDS to the input I of the Nth optical fiber line section FDS_N. The optical data signal OS present at the input I of the Nth optical fiber line section FDS_N is amplified with the aid of the Nth optical amplifier $EDFA_N$, and transferred to the Nth dispersion compensation unit DCU_N via the Nth optical fiber $SSMF_N$. The fiber dispersion, caused by the Nth optical fiber $SSMF_N$, of the optical data signal OS is partially compensated in the Nth dispersion compensation unit DCU_N, from which it can be detected that the residual dispersion D_{rest} of the optical data signal OS rises virtually uniformly by the prescribed absolute-magnitude

dispersion ΔD, and corresponds to the accumulated residual dispersion D_{akk} after the Nth dispersion compensation. The optical data signal OS present at the output E of the Nth optical fiber line section FDS_N is transmitted to the optical receiver RU and, if appropriate, subjected to 3R regeneration - not illustrated in Figure 1 - before further processing.

A dispersion management scheme DCS according to the invention is illustrated schematically by way of example with the aid of a diagram in Figure 2. It is clear therefrom that the optical transmission system OTS is composed according to the invention of a plurality of optical fiber line sections FDS that in each case have an optical fiber SSMF and a dispersion compensation unit DCF, for example a dispersion compensating fiber. In order to explain the dispersion management scheme DCS according to the invention, the number of the optical fiber line sections is limited to four (N=4), such that a first, second, third and fourth optical fiber line section FDS_1, FDS_2, FDS_3, FDS_4 are illustrated in Figure 2, the first optical fiber line section FDS_1 having a first optical fiber $SSMF_1$ and a first optical dispersion compensation unit DCF_1, the second optical fiber line section FDS_2 having a second optical fiber $SSMF_2$ and a second optical dispersion compensation unit DCF_2, the third optical fiber line section FDS_3 having a third optical fiber $SSMF_3$ and a third optical dispersion compensation unit DCF_3, and the fourth optical fiber line section FDS_4 having a fourth optical fiber $SSMF_4$ and a fourth optical dispersion compensation unit DCF_4. As an example, for the dispersion management scheme DCS of the exemplary embodiment the choice here is a virtually identical length for the first to fourth optical fibers $SSMF_1$ to SSMF4 as well as for the first to fourth dispersion compensating fibers DCF_1 to DCF_4.

The diagram has a horizontal axis (abscissa) x and a vertical axis (ordinate) d, the horizontal axis illustrating the distance x from the optical transmitter TU or the range of the optical data transmission, and the vertical axis d illustrating the fiber dispersion d in the respective optical fiber SSMF or in the dispersion compensating fiber DCF.

It is clear from Figure 2 that the fiber dispersion of an optical data signal OS present at the input I of the first optical fiber line section FDS_1 rises linearly from the optical transmitter TU (x=0) along the first optical fiber $SSMF_1$ and assumes a first maximum absolute-magnitude dispersion D_{max1} at an end x_1 of the first optical fiber. The first maximum absolute-magnitude dispersion D_{max1} is partially compensated with the aid of the first dispersion compensation unit DCF_1 or the first dispersion compensating fiber, that is to say at an end x_2 of the first dispersion compensating fiber there is present a first residual dispersion D_{rest1} that corresponds at the output E of the first dispersion compensation unit DCF_1 to the absolute-magnitude dispersion ΔD.

Owing to the following second optical fiber $SSMF_2$, the fiber dispersion d increases from the first residual dispersion D_{rest1} up to a second maximum absolute-magnitude dispersion D_{max2} that is present at an end x_3 of the second dispersion compensating fiber. The second maximum absolute-magnitude dispersion D_{max2} is compensated with the aid of the second dispersion compensation unit DCF_2 or the second dispersion compensating fiber until the second residual dispersion D_{rest2} corresponds to twice the absolute-magnitude dispersion ΔD, that is to say the remaining residual dispersion D_{rest} rises uniformly per optical fiber line section FDS by the absolute-magnitude dispersion ΔD in each case. Consequently, at an end x_4 of

the second dispersion compensating fiber, a second residual dispersion D_{rest2} is present which corresponds at the output E of the second dispersion compensation unit or the second dispersion compensating fiber DCF_2 to twice the absolute-magnitude dispersion ΔD.

The optical data signal OS transferred by the second dispersion compensating fiber DCF_2 to the third optical fiber $SSMF_3$ in turn experiences in the third optical fiber $SSMF_3$ signal distortions caused by the fiber dispersion d which assume a third maximum absolute-magnitude dispersion D_{max3} at an end x_5 of the third optical fiber. The third absolute-magnitude dispersion D_{max3} is undercompensated by the third optical dispersion compensation unit DCF_3 in such a way that the remaining third residual dispersion D_{rest3} corresponds to three times the absolute-magnitude dispersion ΔD according to the invention, that is to say at an end x_6 of the third dispersion compensating fiber the residual dispersion D_{rest} assumes a third residual dispersion D_{rest3}, which has increased once more by the absolute-magnitude dispersion ΔD by comparison with the second residual dispersion D_{rest2}.

Furthermore, the optical data signal OS present at the output E of the third dispersion compensating fiber DCF_3 is transferred to the fourth and last optical fiber $SSMF_4$ of the optical transmission system OTS. It becomes clear with the aid of Figure 2 that the fiber dispersion d continues to increase, and has a fourth maximum absolute-magnitude dispersion D_{max4} at an end x_7 of the fourth optical fiber. With the aid of the fourth dispersion compensation unit DCF_4, the fourth maximum absolute-magnitude dispersion D_{max4} is reduced to the absolute magnitude of the accumulated residual dispersion D_{akk}, which corresponds to four times the absolute-magnitude dispersion ΔD according to the invention. The remaining residual dispersion D_{rest} of

the optical transmission system OTS thereby has the absolute magnitude of the accumulated residual dispersion D_{akk} at an end x_8 of the optical transmission link or at the end of the fourth fiber line section.

The transmission range x_8 that can be bridged without regeneration is virtually doubled by the uniform "splitting up" according to the invention of the accumulated residual dispersion D_{akk} calculated or estimated for the respective optical transmission system OTS into a fixed number of fiber line sections FDS. Here, the fiber line sections FDS of the optical transmission system are undercompensated as a function of the length of the respective optical fiber SSMF as far in each case as a residual dispersion D_{rest} fixed by the accumulated residual dispersion D_{akk}, the residual dispersion D rising from fiber line section FDS_1 to fiber line section FDS_2 by the same absolute-magnitude dispersion in each case.

By comparison with a dispersion management scheme DCS that fully compensates the respective fiber line section FDS of an optical transmission system OTS, the dispersion management scheme DCS of the distributed undercompensation according to the invention can substantially increase the range that can be bridged without regeneration, which leads to a saving of cost-intensive electric 3R regeneration devices.

Moreover, it is possible to implement a bidirectional data transmission over the fiber line sections FDS considered in a simple way on the basis of the symmetrical design, to be seen in Figure 2, of the optical transmission system OTS.

In addition, a fiber line section FDS having an optical fiber SSMF and a dispersion compensation unit DCF can be configured as an optical transmission module M. Consequently, the optical transmission system OTS can be formed by a series circuit of such optical transmission modules M. Such a modular design substantially facilitates in practice the implementation of an optical transmission link or the extension of an existing optical transmission link.

Furthermore, the use of the distributed undercompensation according to the invention is particularly advantageous in the case of optical transmission systems that, because of the data transmission with the aid of a plurality of transmission channels, have a strong cross-phase modulation (XPM) as regards the effect limiting the transmission ranges that can be bridged without regeneration. This strong cross-phase modulation (XPM) can be suppressed by means of the provision according to the invention of a slight, local residual dispersion D_{rest} at the end of a fiber line section FDS. Consequently, not only is the self-phase modulation (SPM) suppressed by the distributed undercompensation according to the invention, but the influence of the cross-phase modulation (XPM) is substantially reduced virtually simultaneously.

The number of the compensated fiber line sections nfs that can be bridged without regeneration is illustrated in a further diagram in Figure 3 as a function of the distributed under- or overcompensation uoc for different input powers P4dBm, P6dBm, P9dBm, P12dBm, P15dBm of the optical data signal OS.

The further diagram has a horizontal axis (abscissa) uoc and a vertical axis (ordinate) nfs, the horizontal axis uoc illustrating the "under- or overcompensation"

scheme, provided for the dispersion compensation, of the optical transmission system OTS, and the vertical axis nfs illustrating the number of the compensated fiber spans or fiber line sections FDS of the optical transmission system OTS. It may also be seen that the uniform undercompensation according to the invention of the plurality of fiber line sections FDS permits an increase in the transmission range that can be bridged without regeneration. The transmission range that can be bridged without regeneration is illustrated in the further diagram by the number of the compensated fiber line sections FDS of the optical transmission system OTS.

For this purpose, a first to fifth optical data signal OS1 to OS5 is fed to an optical test transmission system OTS that has a different input power P in each case. Here, the first optical data signal OS1 has an input power of 4dBm, the second optical data signal OS2 an input power of 6dBm, the third optical data signal OS3 an input power of 9dBm, the fourth optical data signal OS4 an input power of 12dBm, and the fifth optical data signal OS5 an input power of 15dBm.

The increase in the transmission range that can be bridged without regeneration is particularly clear on the profile of the curve for the first optical data signal OS1, since the first optical data signal OS1 can be transmitted without regeneration over virtually 120 fiber line sections FDS in the case of an undercompensation of approximately 0.5 km of a standard monomode fiber (SSMF). In this case, the respective fiber line section FDS is respectively compensated by the dispersion compensating fiber DCF to such an extent that a residual dispersion D_{rest} is present that corresponds to an uncompensated optical fiber length of half a kilometer (0.5 km).

WE CLAIM:

10/088668
JC13 Rec'd PCT/PTO 20 MAR 2002
DE0003256

22-10-2001
1999P02872 WO

~~Description~~
TITLE

Optical transmission system

Background of the Invention

The invention relates to an optical transmission system comprising a fixed number of optical fiber line sections of virtually the same length with ~~in~~ each section ~~case~~ including an optical fiber and a dispersion compensation unit.

Owing to the chromatic dispersion occurring during the transmission of optical signals over optical fibers, and to the self-phase modulation (SPM), distortions are caused in the optical data signal to be transmitted ~~see~~ In this regard please see Grau and Freude: "Optische Nachrichtentechnik - Eine Einführung" ["Optical communications - an introduction"], Springer-Verlag, 3rd Edition, 1991, pages 120-126 in the case of all optical transmission systems with high data throughput rates, and ~~thus~~ also in the case of transmission systems operating using the WDM (Wavelength-Division Multiplexing) principle.

Such distortions in the optical data signal to be transmitted are functions, inter alia, of the input power of the optical data signal. Moreover, such distortions determine the regeneration-free transmission range of an optical transmission system, that is to say the optical transmission link over which an optical data signal can be transmitted without the need to carry out a regeneration or "3R generation" (electronic data regeneration with regard to the amplitude, edge and the clock pulse of an optically transmitted, digital data signal or data stream).

In order to compensate such distortions in the optical data signal, a provision is made for suitable dispersion compensation units during the transmission of optical

AMENDED SHEET

MARKED-UP VERSION

signals via optical standard monomode fibers, or use is made of a dispersion management adapted to the optical

transmission link. For this purpose, such optical transmission systems are subdivided chiefly into a plurality of optical fiber line sections in which the fiber dispersion respectively caused in the optical fiber line section ~~considered~~ is completely or partially compensated with the aid of a dispersion compensation unit.

Such dispersion compensation units are configured, for example, as optical special fibers in the case of which the dispersion or fiber dispersion assumes very high negative values particularly in the 1550 nm window owing to a special selection of the refractive index profile in the fiber core and the surrounding cladding layers of the optical fiber. The dispersion contributions generated by the optical transmission fibers can be effectively compensated with the aid of the high negative dispersion values caused by the dispersion-compensating fiber. In addition, the maximum number of optical fiber line sections or the regeneration-free range of the optical transmission system is determined by the eye diagram (eye-opening) of the optical data signal present at the output of the respective optical fiber line section. This results in a maximum range for a regeneration-free transmission of an optical data signal, which is determined in addition by the optical signal-to-noise ratio of the transmission medium.

In optical transmission systems implemented to date, various dispersion management concepts are pursued for this purpose, the optimum dispersion compensation of an optical transmission link being carried out by using pre- and/or post-compensated optical fiber line sections or differently over- or under-compensated ones. It is therefore possible to transmit over a

specific distance without regeneration depending on the fiber dispersion.

It is known in this regard from DER FERMELDE-INGENIEUR: "Wellenlängenmultiplextechnik in zukünftigen photonischen

Netzen" ["Wavelength division multiplex technology in future photonic networks"], A. Ehrhardt et al., 53rd Volume, Issues 5 and 6, May/June 1999, pages 18-24 that the system optimum for dispersion compensation of an optical transmission system can be reached for a dispersion compensation of less than 100%. It also emerges from the above-named printed publication that the chromatic fiber dispersion can be compensated to a specific proportion by fiber nonlinearities themselves.

Also known from the publication "320-Gb/s (32*10 Gb/s WDM) Transmission Over 500 km of Conventional Single-Mode Fiber with 125-km Amplifier Spacing" by Bigo et al., IEEE Photonics Technology Letters, Vol. 10, No. 7, July 1998 is an optical transmission system that comprises a plurality of optical fiber line sections of virtually the same length with in each case an optical fiber (SMF) and a dispersion compensating fiber (DCF). In order to increase the transmission range of 32 optical 10 Gb/s signals, a specific dispersion overcompensation is carried out at the start of the optical transmission link, and in each case a dispersion overcompensation is carried out at the end in each case of an optical fiber line section with the aid of dispersion compensating fibers.

Summary of the Invention

The object of the present invention is thus to configure an optical transmission system of the type mentioned at the beginning in such a way that the dispersion compensation is improved and/or the transmission range reduced by the signal distortions and capable of being bridged without regeneration is increased. ~~The object is achieved starting from the features specified in the preamble of patent claim 1 by means of the characterizing features of the latter.~~

MARKED-UP VERSION

According to the invention, the object is achieved by means of an optical transmission system ~~in the case of which~~ having a fixed number of optical fiber line sections of virtually the same length with each section having an optical fiber and a dispersion compensation unit with the dispersion compensation units ~~have~~ having virtually the same compensation values, which are determined starting from a calculated or estimated accumulated

residual dispersion for the at least virtually uniformly distributed undercompensation of the fiber dispersion of the fixed number of optical fiber line sections. By comparison with previous systems with full compensation, the virtually uniformly distributed under compensation according to the invention over the individual optical fiber line sections advantageously permits a virtual doubling of the transmission range that can be bridged without regeneration, that is to say under compensation is performed in the respective fiber line sections to such an extent that the remaining residual dispersion corresponds to a multiple of the absolute-magnitude dispersion according to the invention, and that the residual dispersion along the optical transmission link ~~increasing~~ increses per fiber line section by the absolute-magnitude dispersion in each case.

According to a further refinement of the invention, the optical transmission system has an accumulated residual dispersion that is caused by fiber nonlinearities and the fiber dispersion and decreases virtually linearly with increasing data rate. The non linear effect of self-phase modulation and the group velocity dispersion (GVD) are the cause of the accumulated residual dispersion at the end of the last fiber line section of the optical transmission link. In the case of fully compensated fiber line sections, they are virtually independent of the input power of the optical data signal, and influence one another mutually, that is to say the self-phase modulation can have a dispersion-compensating effect. Moreover, the group velocity dispersion in the optical fibers increases with increasing data rate, while the self-phase modulation remains virtually unchanged. Consequently, the self-phase modulation (SPM) in the optical transmission

system contributes to the dispersion compensation[,] with the dispersion compensating effect of the self-phase modulation (SPM) becoming less with increasing data rate with regard to the group velocity dispersion, that is to say the accumulated residual dispersion decreases with increasing data rate.

In accordance with a further refinement of the invention, the dispersion compensation units are provided for compensating the fiber dispersion of all the optical fiber line sections ~~[claim 2]~~. The maximum transmission range that can be bridged without regeneration can be implemented, if the residual dispersion advantageously increases in each case virtually uniformly by the same dispersion contribution in all the fiber line sections of the optical transmission system.

All the optical fiber line sections are the optical transmission are advantageously of virtually the same length, the optical fibers of the fiber line section additionally having a minimum length of 20 km, ~~(claim 5)~~. In the case of a minimum length of approximately 20 kilo meters, the signal distortions caused by the fiber dispersion and the fiber non linearities are virtually at their maximum value. Owing to the splitting of the optical transmission system to optical fiber line sections of virtually the same length and whose number is determined by the optical transmission link to be bridged without regeneration and by the accumulated residual dispersion, an optical transmission system that is optimized with regard to the dispersion compensation and the transmission range that can be bridged without regeneration can be implemented by means of a simple modular design. In particular, the optical transmission system can especially advantageously be implemented a bidirectional data transmission over the fiber line sections owing to the symmetrical design being produced, ~~(thereby - claim 6)~~

Advantageous developments and refinements of the optical transmission system according to the invention are described in the further patent claims.

meters, the signal distortions caused by the fiber dispersion and the fiber nonlinearities are virtually at their maximum value. Owing to the splitting of the optical transmission system into optical fiber line sections of virtually the same length and whose number is determined by the optical transmission link to be bridged without regeneration and by the accumulated residual dispersion, an optical transmission system that is optimized with regard to the dispersion compensation and the transmission range that can be bridged without regeneration can be implemented by means of a simple modular design. In particular, the optical transmission system can be operated particularly advantageously in a bidirectional operating mode owing to the symmetrical design produced thereby - claim 7.

Advantageous developments and refinements of the optical transmission system according to the invention ~~are described in the~~ further patent claims.

Start

Add

The invention is to be explained in more detail below with the aid of a block diagram and two graphs. ~~In the drawings:~~

Brief Description of the ~~Preferred~~ Drawings

Figure 1 shows the principle design of an optical transmission system,

Figure 2 shows a graph of the dispersion management scheme according to the invention, and

Figure 3 shows, in a further graph, the number of the compensated fiber spans or fiber line ~~spans or~~ sections that can be bridged without regeneration, as a function of the distribution of under- or over-compensation.

Description of the Preferred Embodiments

MARKED-UP VERSION

Add

Figure 1 is a schematic of an optical transmission system OTS that has an optical transmitter TU and an optical receiver RU. The optical transmitter TU is connected via N optical fiber line sections FDS_1 to FDS_N, each having an input I and an output E, to the optical receiver

MARKED-UP
VERSION

RU, which in each case have an optical amplifier EDFA, an optical fiber SSMF and an optical dispersion compensation unit DCU.

A first and Nth optical fiber line section FDS_1, FDS_N are illustrated in Figure 1 by way of example, a second to N-1th fiber line section FDS_2 to FDS_{N-1} being indicated with the aid of a dotted line. Moreover, the first optical fiber line section FDS_1 comprises a first optical amplifier $EDFA_1$, a first optical fiber $SSMF_1$, for example an optical standard single mode fiber, and a first optical dispersion compensation unit DCU_1, it being possible also to provide an optical preamplifier - not illustrated in Figure 1 - between the first optical fiber $SSMF_1$ and the first optical dispersion compensation unit DCU_1. Similarly, the Nth optical fiber line section FDS_N has an Nth optical amplifier $EFDA_N$, an Nth optical fiber $SSMF_N$ and an Nth optical dispersion compensation unit DCU_N. In a similar way, it is also possible here to provide a further optical preamplifier - not illustrated in Figure 1 - between the Nth optical fiber $SSMF_N$ and the Nth optical dispersion compensation unit DCU_N.

The optical data signal of the optical data stream OS is transferred by the optical transmitter ~~DU~~ TU to the input I of the first optical fiber line section FDS_1. Inside the first optical fiber line section FDS_1, the optical data signal OS is amplified with the aid of the first optical amplifier $EDFA_1$ and transmitted to the first dispersion compensation unit DCU_1 via the first optical fiber $SSMF_1$. The signal distortions in the optical data signal OS caused by the optical transmission over the first optical fiber $SSMF_1$ are compensated in the first dispersion compensation unit DCU_1 except for a first residual dispersion D_{rest1}, which corresponds to the absolute-magnitude dispersion ΔD according to the invention in the case of the first dispersion compensation

unit DCU_1. The fixed residual dispersion D_{rest} is a fraction, fixed by the number N of the optical fiber line sections FDS, of the accumulated residual dispersion D_{akk}, which rises virtually uniformly with each compensated fiber line section FDS by virtually the same absolute-magnitude dispersion ΔD.

The accumulated residual dispersion D_{akk} is caused by the fiber nonlinearities and the fiber dispersion, and is present at the end of the Nth fiber line section FDS_N. Moreover, the accumulated residual dispersion D_{akk} is not compensated at the end of the Nth fiber line section FDS_N because of the parameters, required for recovering the data from the optical data signal OS, for the eye diagram "eye opening". The optical data signal OS present at the output E of the first optical fiber line section FDS_1 is therefore not completely compensated for dispersion, but undercompensated.

In a similar way to this, the optical data signal OS is transmitted over the further optical fiber line sections FDS to the input I of the Nth optical fiber line section FDS_N. The optical data signal OS present at the input I of the Nth optical fiber line section FDS_N is amplified with the aid of the Nth optical amplifier $EDFA_N$, and transferred to the Nth dispersion compensation unit DCU_N via the Nth optical fiber $SSMF_N$. The fiber dispersion, caused by the Nth optical fiber $SSMF_N$, of the optical data signal OS is partially compensated in the Nth dispersion compensation unit DCU_N, from which it can be detected that the residual dispersion D_{rest} of the optical data signal OS rises virtually uniformly by the prescribed absolute-magnitude dispersion ΔD, and corresponds to the accumulated residual dispersion D_{akk} after the Nth dispersion compensation. The optical data signal OS present at the output E of the Nth optical fiber line

section FDS_N is transmitted to the optical receiver RU and, if appropriate, subjected to 3R regeneration

- not illustrated in Figure 1 - before further processing.

A dispersion management scheme DCS according to the invention is illustrated schematically by way of example with the aid of a diagram in Figure 2. It is clear therefrom that the optical transmission system OTS is composed according to the invention of a plurality of optical fiber line sections FDS that in each case have an optical fiber SSMF and a dispersion compensation unit DCF, for example a dispersion compensating fiber. In order to explain the dispersion management scheme DCS according to the invention, the number of the optical fiber line sections is limited to four (N=4), such that a first, second, third and fourth optical fiber line section FDS_1, FDS_2, FDS_3, FDS_4 are illustrated in Figure 2, the first optical fiber line section FDS_1 having a first optical fiber $SSMF_1$ and a first optical dispersion compensation unit DCF_1, the second optical fiber line section FDS_2 having a second optical fiber $SSMF_2$ and a second optical dispersion compensation unit DCF_2, the third optical fiber line section FDS_3 having a third optical fiber $SSMF_3$ and a third optical dispersion compensation unit DCF_3, and the fourth optical fiber line section FDS_4 having a fourth optical fiber $SSMF_4$ and a fourth optical dispersion compensation unit DCF_4. As an example, for the dispersion management scheme DCS of the exemplary embodiment the choice here is a virtually identical length for the first to fourth optical fibers $SSMF_1$ to SSMF4 as well as for the first to fourth dispersion compensating fibers DCF_1 to DCF_4.

The diagram has a horizontal axis (abscissa) x and a vertical axis (ordinate) d, the horizontal axis illustrating the distance x from the optical transmitter TU or the range of the optical data

MARKED-UP VERSION

transmission, and the vertical axis d illustrating the fiber dispersion d in the

respective optical fiber SSMF or in the dispersion compensating fiber DCF.

It is clear from Figure 2 that the fiber dispersion of an optical data signal OS present at the input I of the first optical fiber line section FDS_1 rises linearly from the optical transmitter TU (x=0) along the first optical fiber $SSMF_1$ and assumes a first maximum absolute-magnitude dispersion D_{max1} at ~~the~~ an end x_1 of the first optical fiber ~~x_1~~. The first maximum absolute-magnitude dispersion D_{max1} is partially compensated with the aid of the first dispersion compensation unit DCF_1 or the first dispersion compensating fiber, that is to say at ~~the~~ an end x_2 of the first dispersion compensating fiber ~~x_2~~ there is present a first residual dispersion D_{rest1} that corresponds at the output E of the first dispersion compensation unit DCF_1 to the absolute-magnitude dispersion ΔD.

Owing to the following second optical fiber $SSMF_2$, the fiber dispersion d increases from the first residual dispersion D_{rest1} up to a second maximum absolute-magnitude dispersion D_{max2} that is present at ~~the~~ an end x_3 of the second dispersion compensating fiber ~~x_3~~. The second maximum absolute-magnitude dispersion D_{max2} is compensated with the aid of the second dispersion compensation unit DCF_2 or the second dispersion compensating fiber until the second residual dispersion D_{rest2} corresponds to twice the absolute-magnitude dispersion ΔD, that is to say the remaining residual dispersion D_{rest} rises uniformly per optical fiber line section FDS by the absolute-magnitude dispersion ΔD in each case. Consequently, at ~~the~~ an end x_4 of the second dispersion compensating fiber ~~x_4~~ a second residual dispersion D_{rest2} is present which corresponds at the output E of the second dispersion compensation unit or the second dispersion compensating fiber DCF_2 to twice the absolute-magnitude dispersion ΔD.

MARKED-UP VERSION

The optical data signal OS transferred by the second dispersion compensating fiber DCF_2 to the third optical fiber $SSMF_3$ in turn experiences in the third optical fiber $SSMF_3$

signal distortions caused by the fiber dispersion d which assume a third maximum absolute-magnitude dispersion D_{max3} at ~~the~~ an end x_5 of the third optical fiber ~~x_5~~. The third absolute-magnitude dispersion D_{max3} is undercompensated by the third optical dispersion compensation unit DCF_3 in such a way that the remaining third residual dispersion D_{rest3} corresponds to three times the absolute-magnitude dispersion ΔD according to the invention, that is to say at ~~the~~ an end x_6 of the third dispersion compensating fiber ~~x_6~~ the residual dispersion D_{rest} assumes a third residual dispersion D_{rest3}, which has increased once more by the absolute-magnitude dispersion ΔD by comparison with the second residual dispersion D_{rest2}.

Furthermore, the optical data signal OS present at the output E of the third dispersion compensating fiber DCF_3 is transferred to the fourth and last optical fiber $SSMF_4$ of the optical transmission system OTS. It becomes clear with the aid of Figure 2 that the fiber dispersion d continues to increase, and has a fourth maximum absolute-magnitude dispersion D_{max4} at ~~the~~ an end x_7 of the fourth optical fiber ~~x_7~~. With the aid of the fourth dispersion compensation unit DCF_4, the fourth maximum absolute-magnitude dispersion D_{max4} is reduced to the absolute magnitude of the accumulated residual dispersion D_{akk}, which corresponds to four times the absolute-magnitude dispersion ΔD according to the invention. The remaining residual dispersion D_{rest} of the optical transmission system OTS thereby has the absolute magnitude of the accumulated residual dispersion D_{akk} at ~~the~~ an end x_8 of the optical transmission link or at the end of the fourth fiber line section ~~x_8~~.

The transmission range x_8 that can be bridged without regeneration is virtually doubled by the uniform "splitting up" according to the invention of the accumulated residual dispersion D_{akk} calculated or

MARKED-UP VERSION

estimated for the respective optical transmission system OTS into a fixed number of fiber line sections FDS. Here, the fiber line sections FDS of the optical transmission system are undercompensated as a function of the length of the respective optical fiber SSMF as far in each case as a residual dispersion D_{rest} fixed by the accumulated

residual dispersion D_{akk}, the residual dispersion D rising from fiber line section FDS_1 to fiber line section FDS_2 by the same absolute-magnitude dispersion in each case.

By comparison with a dispersion management scheme DCS that fully compensates the respective fiber line section FDS of an optical transmission system OTS, the dispersion management scheme DCS of the distributed undercompensation according to the invention can substantially increase the range that can be bridged without regeneration, which leads to a saving of cost-intensive electric 3R regeneration devices.

Moreover, it is possible to implement a bidirectional data transmission over the fiber line sections FDS considered in a simple way on the basis of the symmetrical design, to be seen in Figure 2, of the optical transmission system OTS.

In addition, a fiber line section FDS having an optical fiber SSMF and a dispersion compensation unit DCF can be configured as an optical transmission module M. Consequently, the optical transmission system OTS can be formed by a series circuit of such optical transmission modules M. Such a modular design substantially facilitates in practice the implementation of an optical transmission link or the extension of an existing optical transmission link.

Furthermore, the use of the distributed undercompensation according to the invention is particularly advantageous in the case of optical transmission systems that, because of the data transmission with the aid of a plurality of transmission channels, have a strong cross-phase modulation (XPM) as regards the effect limiting the transmission

ranges that can be bridged without regeneration. This strong cross-phase modulation (XPM)

can be suppressed by means of the provision according to the invention of a slight, local residual dispersion D_{rest} at the end of a fiber line section FDS. Consequently, not only is the self-phase modulation (SPM) suppressed by the distributed undercompensation according to the invention, but the influence of the cross-phase modulation (XPM) is substantially reduced virtually simultaneously.

The number of the compensated fiber line sections nfs that can be bridged without regeneration is illustrated in a further diagram in Figure 3 as a function of the distributed under- or overcompensation uoc ~~UOC~~ for different input powers P4dBm, P6dBm, P9dBm, P12dBm, P15dBm of the optical data signal OS.

Small letters

The further diagram has a horizontal axis (abscissa) uoc and a vertical axis (ordinate) ~~Doc~~ nfs, the horizontal axis uoc illustrating the "under- or overcompensation" scheme, provided for the dispersion compensation, of the optical transmission system OTS, and the vertical axis nfs illustrating the number of the compensated fiber spans or fiber line sections FDS ~~FTS~~ of the optical transmission system OTS. It may also be seen that the uniform undercompensation according to the invention of the plurality of fiber line sections FDS permits an increase in the transmission range that can be bridged without regeneration. The transmission range that can be bridged without regeneration is illustrated in the further diagram by the number of the compensated fiber line sections FDS of the optical transmission system OTS.

For this purpose, a first to fifth optical data signal OS1 to OS5 is fed to an optical test transmission system OTS that has a different input power P in each case. Here, the first optical data signal OS1 has an input power of 4dBm, the second optical data signal OS2

an input power of 6dBm, the third optical data signal OS3 an input power of 9dBm, the fourth op-

tical data signal OS4 an input power of 12dBm, and the fifth optical data signal OS5 an input power of 15dBm.

The increase in the transmission range that can be bridged without regeneration is particularly clear on the profile of the curve for the first optical data signal OS1, since the first optical data signal OS1 can be transmitted without regeneration over virtually 120 fiber line sections FDS in the case of an undercompensation of approximately 0.5 km of a standard monomode fiber (SSMF). In this case, the respective fiber line section FDS is respectively compensated by the dispersion compensating fiber DCF to such an extent that a residual dispersion D_{rest} is present that corresponds to an uncompensated optical fiber length of half a kilometer (0.5 km).

MARKED-UP VERSION

~~Patent claims~~
We claim:

1. An optical transmission system (OTS) comprising a fixed number (N) of optical fiber line sections (FDS_1 to FDS_4) of virtually the same length with in each case an optical fiber ($SSMF_1$ to $SSMF_4$) and a dispersion compensation unit (DCF_1 to DCF_4), characterized in that the dispersion compensation units (DCF_1 to DCF_4) have virtually the same compensation values, which are determined starting from a calculated or estimated accumulated residual dispersion (D_{akk}) for an at least virtually uniformly distributed undercompensation of the fiber dispersion (d) of the fixed number (N) of optical fiber line sections (FDS_1 to FDS_4).

2. The optical transmission system as claimed in claim 1, characterized in that the dispersion compensation units (DCF_1 to DCF_4) are provided for compensating the fiber dispersion (d) of all the optical fiber line sections (FDS_1 to FDS_4).

3. The optical transmission system as claimed in one of claims 1 or 2, characterized in that a fiber line section (FDS_1) having an optical fiber ($SSMF_1$) and a dispersion compensation unit (DCF_1) implements an optical transmission module (M).

4. The optical transmission system as claimed in claim 3, characterized in that the optical transmission system (OTS) can be formed from a plurality of optical transmission modules (M) arranged in series.

MARKED-UP VERSION

AMENDED SHEET

Abstract of the Disclosure

~~Optical transmission system~~

~~The invention relates to~~ An optical transmission system ~~(OTS) comprising~~ has a plurality of optical fiber line sections ~~(FDS)~~ with ~~in~~ each ~~case~~ section including an optical fiber ~~(SSMF)~~ and a dispersion compensation unit ~~(DCF)~~. ~~in the case of which~~ The dispersion compensation units ~~(DCF)~~ are provided ~~that~~ to compensate for the fiber dispersion (d) of a plurality of fiber line sections ~~(FDS_1 to FDS_4)~~ in such a way that the remaining residual dispersion ~~(D_{rest})~~ per compensated fiber line section ~~(FDS_1 to FDS_4)~~ ~~rises~~ occurs at least virtually uniformly by the same absolute-magnitude dispersion (ΔD). ~~in each case.~~

~~Figure 2~~

PCT/DE00/03256
10/088668
JC13 Rec'd PCT/PTC 20 MAR 2002
DE0003256

22-10-2001
1999P02872 WO

3|prts

Description

Optical transmission system

The invention relates to an optical transmission system comprising a fixed number of optical fiber line sections of virtually the same length with in each case an optical fiber and a dispersion compensation unit.

Owing to the chromatic dispersion occurring during the transmission of optical signals over optical fibers, and to the self-phase modulation (SPM), distortions are caused in the optical data signal to be transmitted - see in this regard Grau and Freude: "Optische Nachrichtentechnik - Eine Einführung" ["Optical communications - an introduction"], Springer-Verlag, 3rd Edition, 1991, pages 120-126 - in the case of all optical transmission systems with high data throughput rates, thus also in the case of transmission systems operating using the WDM (Wavelength-Division Multiplexing) principle.

Such distortions in the optical data signal to be transmitted are functions, inter alia, of the input power of the optical data signal. Moreover, such distortions determine the regeneration-free transmission range of an optical transmission system, that is to say the optical transmission link over which an optical data signal can be transmitted without the need to carry out a regeneration or "3R generation" (electronic data regeneration with regard to the amplitude, edge and the clock pulse of an optically transmitted, digital data signal or data stream).

In order to compensate such distortions in the optical data signal, provision is made for suitable dispersion compensation units during the transmission of optical

signals via optical standard monomode fibers, or use is made of a dispersion management adapted to the optical

transmission link. For this purpose, such optical transmission systems are subdivided chiefly into a plurality of optical fiber line sections in which the fiber dispersion respectively caused in the optical fiber line section considered is completely or partially compensated with the aid of a dispersion compensation unit.

Such dispersion compensation units are configured, for example, as optical special fibers in the case of which the dispersion or fiber dispersion assumes very high negative values particularly in the 1550 nm window owing to a special selection of the refractive index profile in the fiber core and the surrounding cladding layers of the optical fiber. The dispersion contributions generated by the optical transmission fibers can be effectively compensated with the aid of the high negative dispersion values caused by the dispersion-compensating fiber. In addition, the maximum number of optical fiber line sections or the regeneration-free range of the optical transmission system is determined by the eye diagram (eye-opening) of the optical data signal present at the output of the respective optical fiber line section. This results in a maximum range for a regeneration-free transmission of an optical data signal, which is determined in addition by the optical signal-to-noise ratio of the transmission medium.

In optical transmission systems implemented to date, various dispersion management concepts are pursued for this purpose, the optimum dispersion compensation of an optical transmission link being carried out by using pre- and/or post-compensated optical fiber line sections or differently over- or under-compensated ones. It is therefore possible to transmit over a

specific distance without regeneration depending on the fiber dispersion.

It is known in this regard from DER FERMELDE-INGENIEUR: "Wellenlängenmultiplextechnik in zukünftigen photonischen

Netzen" ["Wavelength division multiplex technology in future photonic networks"], A. Ehrhardt et al., 53rd Volume, Issues 5 and 6, May/June 1999, pages 18-24 that the system optimum for dispersion compensation of an optical transmission system can be reached for a dispersion compensation of less than 100%. It also emerges from the above-named printed publication that the chromatic fiber dispersion can be compensated to a specific proportion by fiber nonlinearities themselves.

Also known from the publication "320-Gb/s (32*10 Gb/s WDM) Transmission Over 500 km of Conventional Single-Mode Fiber with 125-km Amplifier Spacing" by Bigo et al., IEEE Photonics Technology Letters, Vol. 10, No. 7, July 1998 is an optical transmission system that comprises a plurality of optical fiber line sections of virtually the same length with in each case an optical fiber (SMF) and a dispersion compensating fiber (DCF). In order to increase the transmission range of 32 optical 10 Gb/s signals, a specific dispersion overcompensation is carried out at the start of the optical transmission link, and in each case a dispersion overcompensation is carried out at the end in each case of an optical fiber line section with the aid of dispersion compensating fibers.

The object of the present invention is thus to configure an optical transmission system of the type mentioned at the beginning in such a way that the dispersion compensation is improved and/or the transmission range reduced by the signal distortions and capable of being bridged without regeneration is increased. The object is achieved starting from the features specified in the preamble of patent claim 1 by means of the characterizing features of the latter.

According to the invention, the object is achieved by means of an optical transmission system in the case of which the dispersion compensation units have virtually the same compensation values, which are determined starting from a calculated or estimated accumulated

residual dispersion for the at least virtually uniformly distributed undercompensation of the fiber dispersion of the fixed number of optical fiber line sections. By comparison with previous systems with full compensation, the virtually uniformly distributed under compensation according to the invention over the individual optical fiber line sections advantageously permits a virtual doubling of the transmission range that can be bridged without regeneration, that is to say under compensation is performed in the respective fiber line sections to such an extent that the remaining residual dispersion corresponds to a multiple of the absolute-magnitude dispersion according to the invention, the residual dispersion along the optical transmission link increasing per fiber line section by the absolute-magnitude dispersion in each case.

According to a further refinement of the invention, the optical transmission system has an accumulated residual dispersion that is caused by fiber nonlinearities and the fiber dispersion and decreases virtually linearly with increasing data rate. The non linear effect of self-phase modulation and the group velocity dispersion (GVD) are the cause of the accumulated residual dispersion at the end of the last fiber line section of the optical transmission link. In the case of fully compensated fiber line sections, they are virtually independent of the input power of the optical data signal, and influence one another mutually, that is to say the self-phase modulation can have a dispersion-compensating effect. Moreover, the group velocity dispersion in the optical fibers increases with increasing data rate, while the self-phase modulation remains virtually unchanged. Consequently, the self-phase modulation (SPM) in the optical transmission

system contributes to the dispersion compensation, the dispersion compensating effect of the self-phase modulation (SPM) becoming less with increasing data rate with regard to the group velocity dispersion, that is to say the accumulated residual dispersion decreases with increasing data rate.

In accordance with a further refinement of the invention, the dispersion compensation units are provided for compensating the fiber dispersion of all the optical fiber line sections - claim 2. The maximum transmission range that can be bridged without regeneration can be implemented, if the residual dispersion advantageously increases in each case virtually uniformly by the same dispersion contribution in all the fiber line sections of the optical transmission system.

All the optical fiber line sections are the optical transmission are advantageously of virtually the same length, the optical fibers of the fiber line section additionally having a minimum length of 20 km - claim 5. In the case of a minimum length of approximately 20 kilo meters, the signal distortions caused by the fiber dispersion and the fiber non linearities are virtually at their maximum value. Owing to the splitting of the optical transmission system to optical fiber line sections of virtually the same length and whose number is determined by the optical transmission link to be bridged without regeneration and by the accumulated residual dispersion, an optical transmission system that is optimized with regard to the dispersion compensation and the transmission range that can be bridged without regeneration can be implemented by means of a simple modular design. In particular, the optical transmission system can especially advantageously be implemented a bidirectional data transmission over the fiber line sections owing to the symmetrical design produced thereby - claim 6.

Advantageous developments and refinements of the optical transmission system according to the invention are described in the further patent claims.

Figure 1 is a schematic of an optical transmission system OTS that has an optical transmitter TU and an optical receiver RU. The optical transmitter TU is connected via N optical fiber line sections FDS_1 to FDS_n, each having an input I and an output E, to the optical receiver

RU, which in each case have an optical amplifier EDFA, an optical fiber SSMF and an optical dispersion compensation unit DCU.

A first and Nth optical fiber line section FDS_1, FDSn are illustrated in Figure 1 by way of example, a second to N-1th fiber line section FDS_2 to FDS_{n-1} being indicated with the aid of a dotted line. Moreover, the first optical fiber line section FDS_1 comprises a first optical amplifier $EDFA_1$, a first optical fiber $SSMF_1$, for example an optical standard single mode fiber, and a first optical dispersion compensation unit DCU_1, it being possible also to provide an optical preamplifier - not illustrated in Figure 1 - between the first optical fiber $SSMF_1$ and the first optical dispersion compensation unit DCU_1. Similarly, the Nth optical fiber line section FDS_n has an Nth optical amplifier $EFDA_N$, an Nth optical fiber $SSMF_N$ and an Nth optical dispersion compensation unit DCU_N. In a similar way, it is also possible here to provide a further optical preamplifier - not illustrated in Figure 1 - between the Nth optical fiber $SSMF_N$ and the Nth optical dispersion compensation unit DCU_N.

The optical data signal of the optical data stream OS is transferred by the optical transmitter DU to the input I of the first optical fiber line section FDS_1. Inside the first optical fiber line section FDS_1, the optical data signal OS is amplified with the aid of the first optical amplifier $EDFA_1$ and transmitted to the first dispersion compensation unit DCU_1 via the first optical fiber $SSMF_1$. The signal distortions in the optical data signal OS caused by the optical transmission over the first optical fiber $SSMF_1$ are compensated in the first dispersion compensation unit DCU_1 except for a first residual dispersion D_{rest1}, which corresponds to the absolute-magnitude dispersion ΔD according to the invention in the case of the first dispersion compensation

unit DCU_1. The fixed residual dispersion D_{rest} is a fraction, fixed by the number N of the optical fiber line sections FDS, of the accumulated residual dispersion D_{akk}, which rises virtually uniformly with each compensated fiber line section FDS by virtually the same absolute-magnitude dispersion ΔD.

The accumulated residual dispersion D_{akk} is caused by the fiber nonlinearities and the fiber dispersion, and is present at the end of the Nth fiber line section FDS_n. Moreover, the accumulated residual dispersion D_{akk} is not compensated at the end of the Nth fiber line section FDS_n because of the parameters, required for recovering the data from the optical data signal OS, for the eye diagram eye opening. The optical data signal OS present at the output E of the first optical fiber line section FDS_1 is therefore not completely compensated for dispersion, but undercompensated.

In a similar way to this, the optical data signal OS is transmitted over the further optical fiber line sections FDS to the input I of the Nth optical fiber line section FDS_N. The optical data signal OS present at the input I of the Nth optical fiber line section FDS_N is amplified with the aid of the Nth optical amplifier $EDFA_N$, and transferred to the Nth dispersion compensation unit DCU_N via the Nth optical fiber $SSMF_N$. The fiber dispersion, caused by the Nth optical fiber $SSMF_N$, of the optical data signal OS is partially compensated in the Nth dispersion compensation unit DCU_N, from which it can be detected that the residual dispersion D_{rest} of the optical data signal OS rises virtually uniformly by the prescribed absolute-magnitude dispersion ΔD, and corresponds to the accumulated residual dispersion D_{akk} after the Nth dispersion compensation. The optical data signal OS present at the output E of the Nth optical fiber line

section FDS_N is transmitted to the optical receiver RU and, if appropriate, subjected to 3R regeneration

- not illustrated in Figure 1 - before further processing.

A dispersion management scheme DCS according to the invention is illustrated schematically by way of example with the aid of a diagram in Figure 2. It is clear therefrom that the optical transmission system OTS is composed according to the invention of a plurality of optical fiber line sections FDS that in each case have an optical fiber SSMF and a dispersion compensation unit DCF, for example a dispersion compensating fiber. In order to explain the dispersion management scheme DCS according to the invention, the number of the optical fiber line sections is limited to four (N=4), such that a first, second, third and fourth optical fiber line section FDS_1, FDS_2, FDS_3, FDS_4 are illustrated in Figure 2, the first optical fiber line section FDS_1 having a first optical fiber $SSMF_1$ and a first optical dispersion compensation unit DCF_1, the second optical fiber line section FDS_2 having a second optical fiber $SSMF_2$ and a second optical dispersion compensation unit DCF_2, the third optical fiber line section FDS_3 having a third optical fiber $SSMF_3$ and a third optical dispersion compensation unit DCF_3, and the fourth optical fiber line section FDS_4 having a fourth optical fiber $SSMF_4$ and a fourth optical dispersion compensation unit DCF_4. As an example, for the dispersion management scheme DCS of the exemplary embodiment the choice here is a virtually identical length for the first to fourth optical fibers $SSMF_1$ to SSMF4 as well as for the first to fourth dispersion compensating fibers DCF_1 to DCF_4.

The diagram has a horizontal axis (abscissa) x and a vertical axis (ordinate) d, the horizontal axis illustrating the distance x from the optical transmitter TU or the range of the optical data

transmission, and the vertical axis d illustrating the fiber dispersion d in the

respective optical fiber SSMF or in the dispersion compensating fiber DCF.

It is clear from Figure 2 that the fiber dispersion of an optical data signal OS present at the input I of the first optical fiber line section FDS_1 rises linearly from the optical transmitter TU (x=0) along the first optical fiber $SSMF_1$ and assumes a first maximum absolute-magnitude dispersion D_{max1} at the end of the first optical fiber x_1. The first maximum absolute-magnitude dispersion D_{max1} is partially compensated with the aid of the first dispersion compensation unit DCF_1 or the first dispersion compensating fiber, that is to say at the end of the first dispersion compensating fiber x_2 there is present a first residual dispersion D_{rest1} that corresponds at the output E of the first dispersion compensation unit DCF_1 to the absolute-magnitude dispersion ΔD.

Owing to the following second optical fiber $SSMF_2$, the fiber dispersion d increases from the first residual dispersion D_{rest1} up to a second maximum absolute-magnitude dispersion D_{max2} that is present at the end of the second dispersion compensating fiber x_3. The second maximum absolute-magnitude dispersion D_{max2} is compensated with the aid of the second dispersion compensation unit DCF_2 or the second dispersion compensating fiber until the second residual dispersion D_{rest2} corresponds to twice the absolute-magnitude dispersion ΔD, that is to say the remaining residual dispersion D_{rest} rises uniformly per optical fiber line section FDS by the absolute-magnitude dispersion ΔD in each case. Consequently, at the end of the second dispersion compensating fiber x_4 a second residual dispersion D_{rest2} is present which corresponds at the output E of the second dispersion compensation unit or the second dispersion compensating fiber DCF_2 to twice the absolute-magnitude dispersion ΔD.

The optical data signal OS transferred by the second dispersion compensating fiber DCF_2 to the third optical fiber $SSMF_3$ in turn experiences in the third optical fiber $SSMF_3$

signal distortions caused by the fiber dispersion d which assume a third maximum absolute-magnitude dispersion D_{max3} at the end of the third optical fiber x_5. The third absolute-magnitude dispersion D_{max3} is undercompensated by the third optical dispersion compensation unit DCF_3 in such a way that the remaining third residual dispersion D_{rest3} corresponds to three times the absolute-magnitude dispersion ΔD according to the invention, that is to say at the end of the third dispersion compensating fiber x_6 the residual dispersion D_{rest} assumes a third residual dispersion D_{rest3}, which has increased once more by the absolute-magnitude dispersion ΔD by comparison with the second residual dispersion D_{rest2}.

Furthermore, the optical data signal OS present at the output E of the third dispersion compensating fiber DCF_3 is transferred to the fourth and last optical fiber $SSMF_4$ of the optical transmission system OTS. It becomes clear with the aid of Figure 2 that the fiber dispersion d continues to increase, and has a fourth maximum absolute-magnitude dispersion D_{max4} at the end of the fourth optical fiber x_7. With the aid of the fourth dispersion compensation unit DCF_4, the fourth maximum absolute-magnitude dispersion D_{max4} is reduced to the absolute magnitude of the accumulated residual dispersion D_{akk}, which corresponds to four times the absolute-magnitude dispersion ΔD according to the invention. The remaining residual dispersion D_{rest} of the optical transmission system OTS thereby has the absolute magnitude of the accumulated residual dispersion D_{akk} at the end of the optical transmission link or at the end of the fourth fiber line section x_8.

The transmission range x_8 that can be bridged without regeneration is virtually doubled by the uniform "splitting up" according to the invention of the accumulated residual dispersion D_{akk} calculated or

estimated for the respective optical transmission system OTS into a fixed number of fiber line sections FDS. Here, the fiber line sections FDS of the optical transmission system are undercompensated as a function of the length of the respective optical fiber SSMF as far in each case as a residual dispersion D_{rest} fixed by the accumulated

residual dispersion D_{akk}, the residual dispersion D rising from fiber line section FDS_1 to fiber line section FDS_2 by the same absolute-magnitude dispersion in each case.

By comparison with a dispersion management scheme DCS that fully compensates the respective fiber line section FDS of an optical transmission system OTS, the dispersion management scheme DCS of the distributed undercompensation according to the invention can substantially increase the range that can be bridged without regeneration, which leads to a saving of cost-intensive electric 3R regeneration devices.

Moreover, it is possible to implement a bidirectional data transmission over the fiber line sections FDS considered in a simple way on the basis of the symmetrical design, to be seen in Figure 2, of the optical transmission system OTS.

In addition, a fiber line section FDS having an optical fiber SSMF and a dispersion compensation unit DCF can be configured as an optical transmission module M. Consequently, the optical transmission system OTS can be formed by a series circuit of such optical transmission modules M. Such a modular design substantially facilitates in practice the implementation of an optical transmission link or the extension of an existing optical transmission link.

Furthermore, the use of the distributed undercompensation according to the invention is particularly advantageous in the case of optical transmission systems that, because of the data transmission with the aid of a plurality of transmission channels, have a strong cross-phase modulation (XPM) as regards the effect limiting the transmission

ranges that can be bridged without regeneration. This strong cross-phase modulation (XPM)

can be suppressed by means of the provision according to the invention of a slight, local residual dispersion D_{rest} at the end of a fiber line section FDS. Consequently, not only is the self-phase modulation (SPM) suppressed by the distributed undercompensation according to the invention, but the influence of the cross-phase modulation (XPM) is substantially reduced virtually simultaneously.

The number of the compensated fiber line sections nfs that can be bridged without regeneration is illustrated in a further diagram in Figure 3 as a function of the distributed under- or overcompensation UOC for different input powers P4dBm, P6dBm, P9dBm, P12dBm, P15dBm of the optical data signal OS.

The further diagram has a horizontal axis (abscissa) and a vertical axis (ordinate) uoc, nfs, the horizontal axis illustrating the "under- or overcompensation" scheme, provided for the dispersion compensation, of the optical transmission system OTS, and the vertical axis nfs illustrating the number of the compensated fiber line sections FTS of the optical transmission system OTS. It may also be seen that the uniform undercompensation according to the invention of the plurality of fiber line sections FDS permits an increase in the transmission range that can be bridged without regeneration. The transmission range that can be bridged without regeneration is illustrated in the further diagram by the number of the compensated fiber line sections FDS of the optical transmission system OTS.

For this purpose, a first to fifth optical data signal OS1 to OS5 is fed to an optical test transmission system OTS that has a different input power P in each case. Here, the first optical data signal OS1 has an input power of 4dBm, the second optical data signal OS2

an input power of 6dBm, the third optical data signal OS3 an input power of 9dBm, the fourth op-

tical data signal OS4 an input power of 12dBm, and the fifth optical data signal OS5 an input power of 15dBm.

The increase in the transmission range that can be bridged without regeneration is particularly clear on the profile of the curve for the first optical data signal OS1, since the first optical data signal OS1 can be transmitted without regeneration over virtually 120 fiber line sections FDS in the case of an undercompensation of approximately 0.5 km of a standard monomode fiber (SSMF). In this case, the respective fiber line section FDS is respectively compensated by the dispersion compensating fiber DCF to such an extent that a residual dispersion D_{rest} is present that corresponds to an uncompensated optical fiber length of half a kilometer (0.5 km).

Patent claims

1. An optical transmission system (OTS) comprising a fixed number (N) of optical fiber line sections (FDS_1 to FDS_4) of virtually the same length with in each case an optical fiber ($SSMF_1$ to $SSMF_4$) and a dispersion compensation unit (DCF_1 to DCF_4), characterized in that the dispersion compensation units (DCF_1 to DCF_4) have virtually the same compensation values, which are determined starting from a calculated or estimated accumulated residual dispersion (D_{akk}) for an at least virtually uniformly distributed undercompensation of the fiber dispersion (d) of the fixed number (N) of optical fiber line sections (FDS_1 to FDS_4).

2. The optical transmission system as claimed in claim 1, characterized in that the dispersion compensation units (DCF_1 to DCF_4) are provided for compensating the fiber dispersion (d) of all the optical fiber line sections (FDS_1 to FDS_4).

3. The optical transmission system as claimed in one of claims 1 or 2, characterized in that a fiber line section (FDS_1) having an optical fiber ($SSMF_1$) and a dispersion compensation unit (DCF_1) implements an optical transmission module (M).

4. The optical transmission system as claimed in claim 3, characterized in that the optical transmission system (OTS) can be formed from a plurality of optical transmission modules (M) arranged in series.

5. The optical transmission system as claimed in one of claims 1 to 4, characterized in that the optical fibers (SSMF) of the fiber link sections (FDS) have a minimum length of 20 kilometers.

6. The optical transmission system as claimed in one of claims 1 to 5, characterized in that a bidirectional data transmission can be implemented via the fiber line sections (FDS_1 to FDS_4).

Abstract

Optical transmission system

The invention relates to an optical transmission system (OTS) comprising a plurality of optical fiber line sections (FDS) with in each case an optical fiber (SSMF) and a dispersion compensation unit (DCF), in the case of which dispersion compensation units (DCF) are provided that compensate the fiber dispersion (d) of a plurality of fiber line sections (FDS_1 to FDS_4) in such a way that the remaining residual dispersion (D_{rest}) per compensated fiber line section (FDS_1 to FDS_4) rises at least virtually uniformly by the same absolute-magnitude dispersion (ΔD) in each case.

Figure 2

FIG. 1

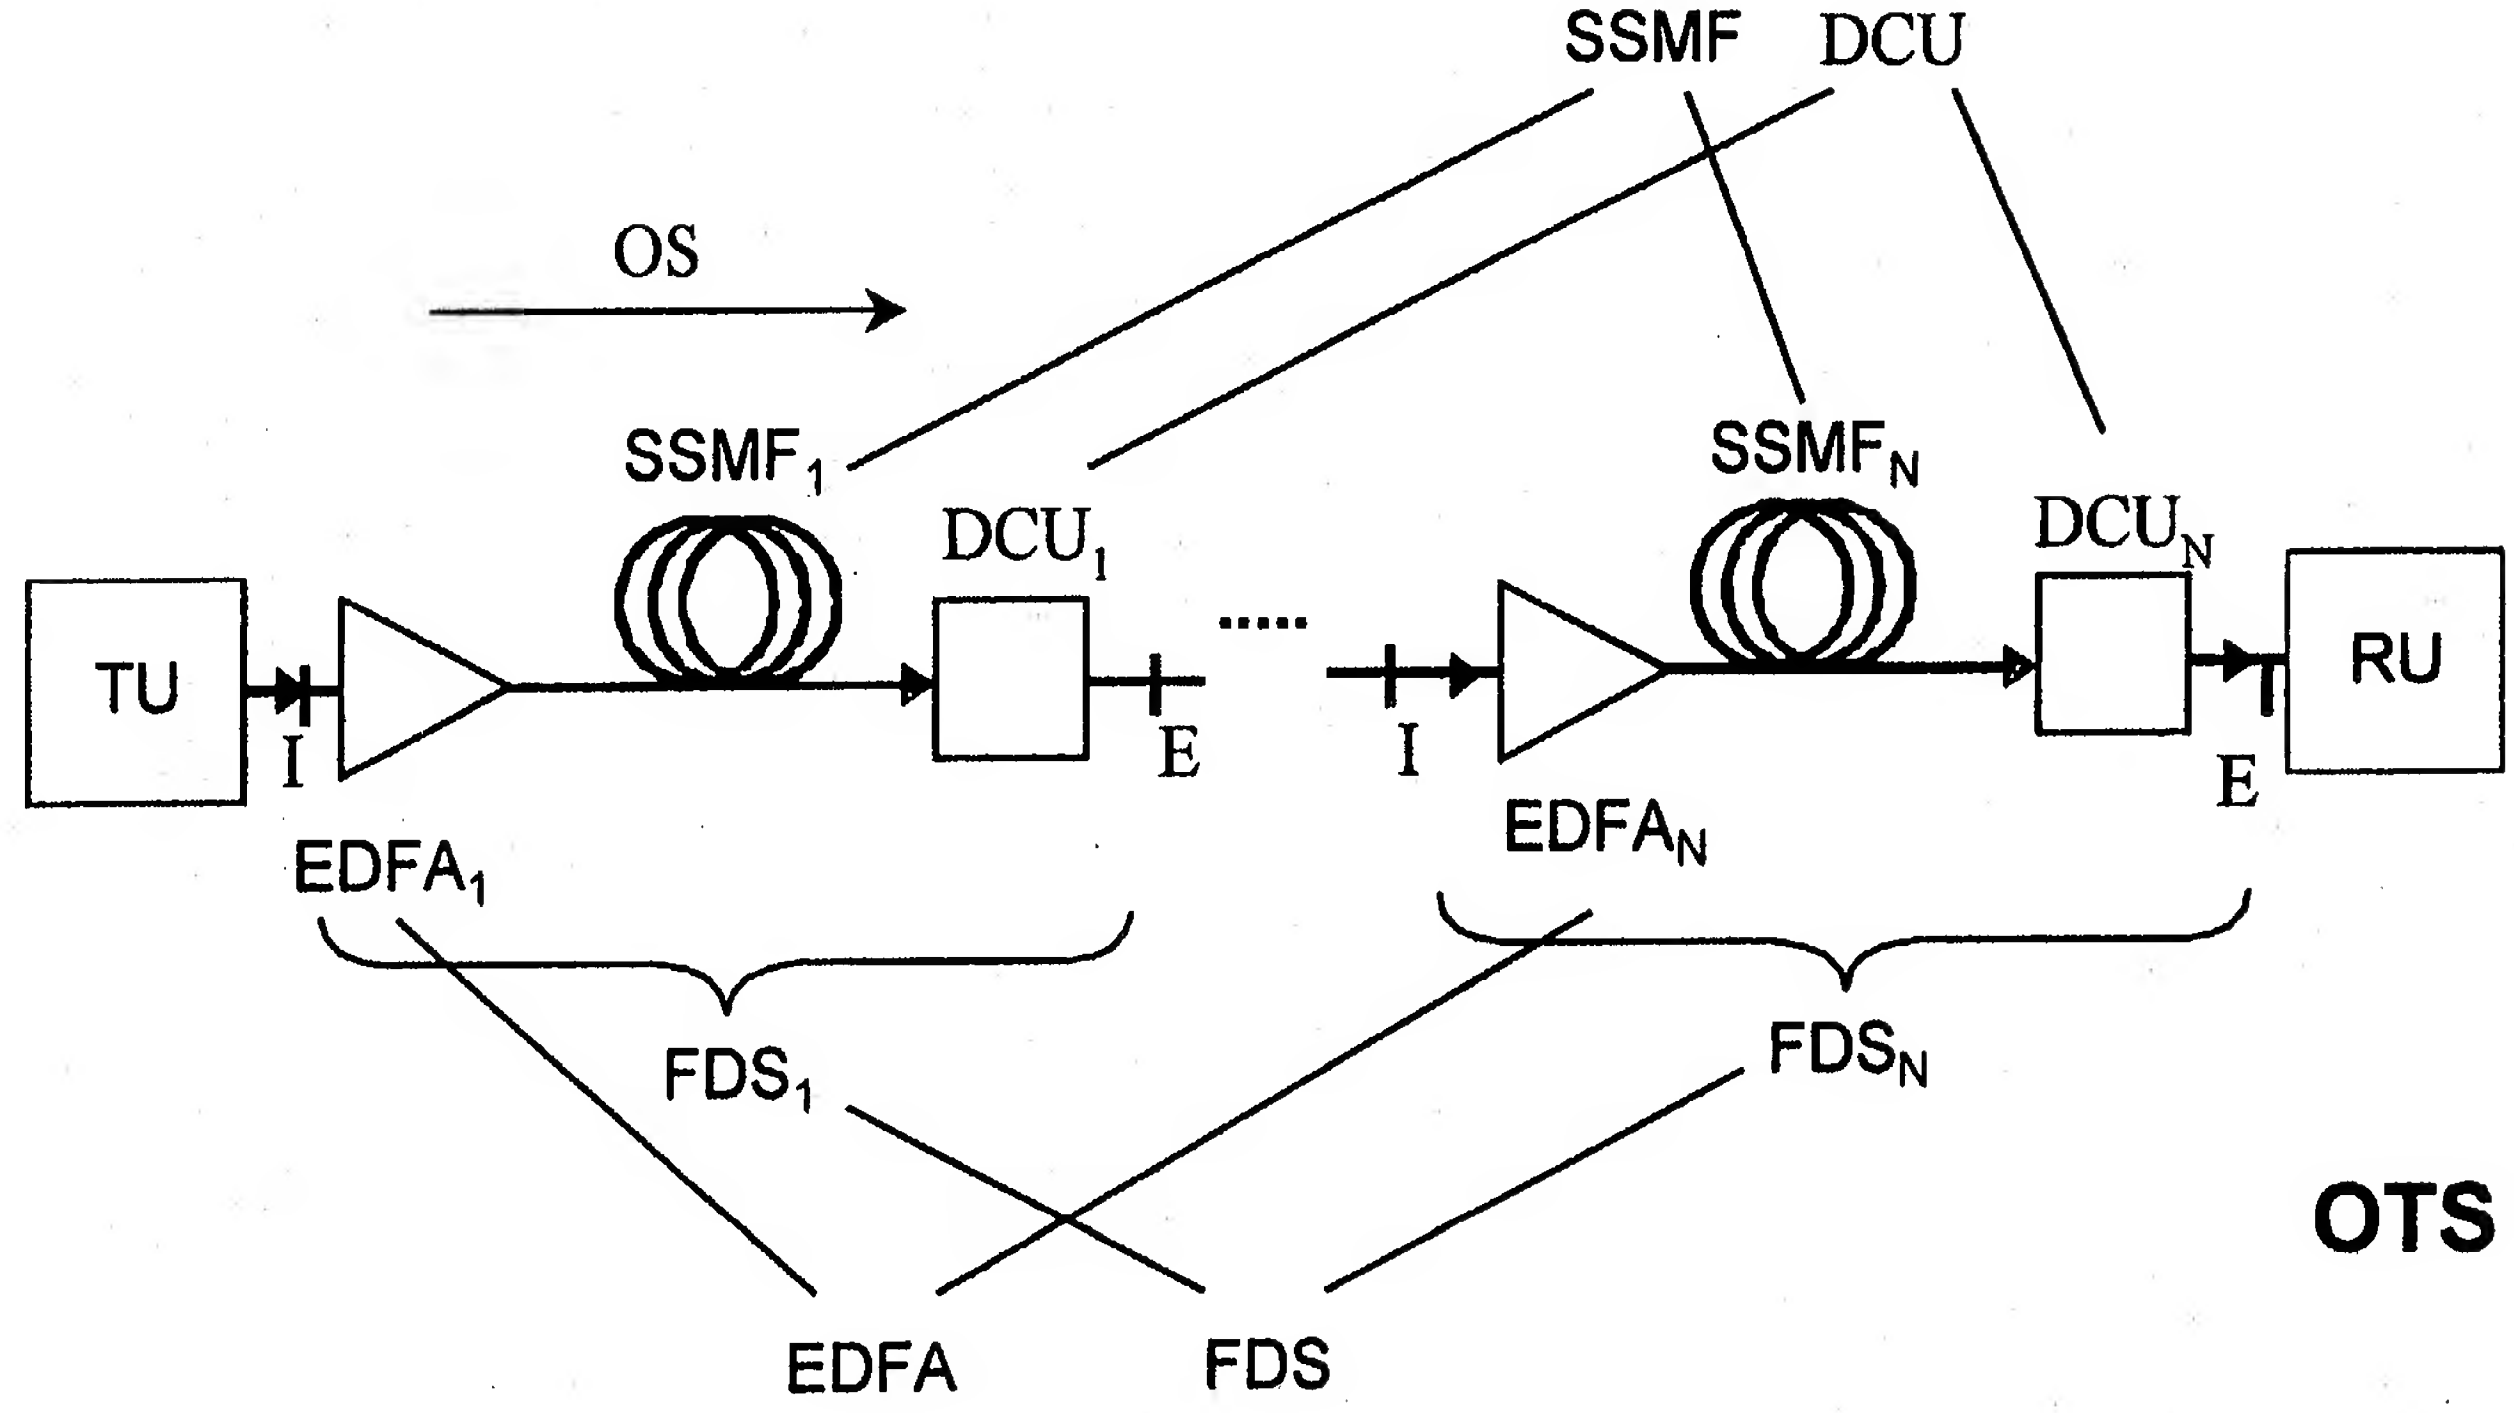
SSMF
DCU
OS
SSMF$_1$
DCU$_1$
SSMF$_N$
DCU$_N$
TU
I
E
I
RU
E
EDFA$_1$
EDFA$_N$
FDS$_1$
FDS$_N$
OTS
EDFA
FDS

10/088668

FIG. 2

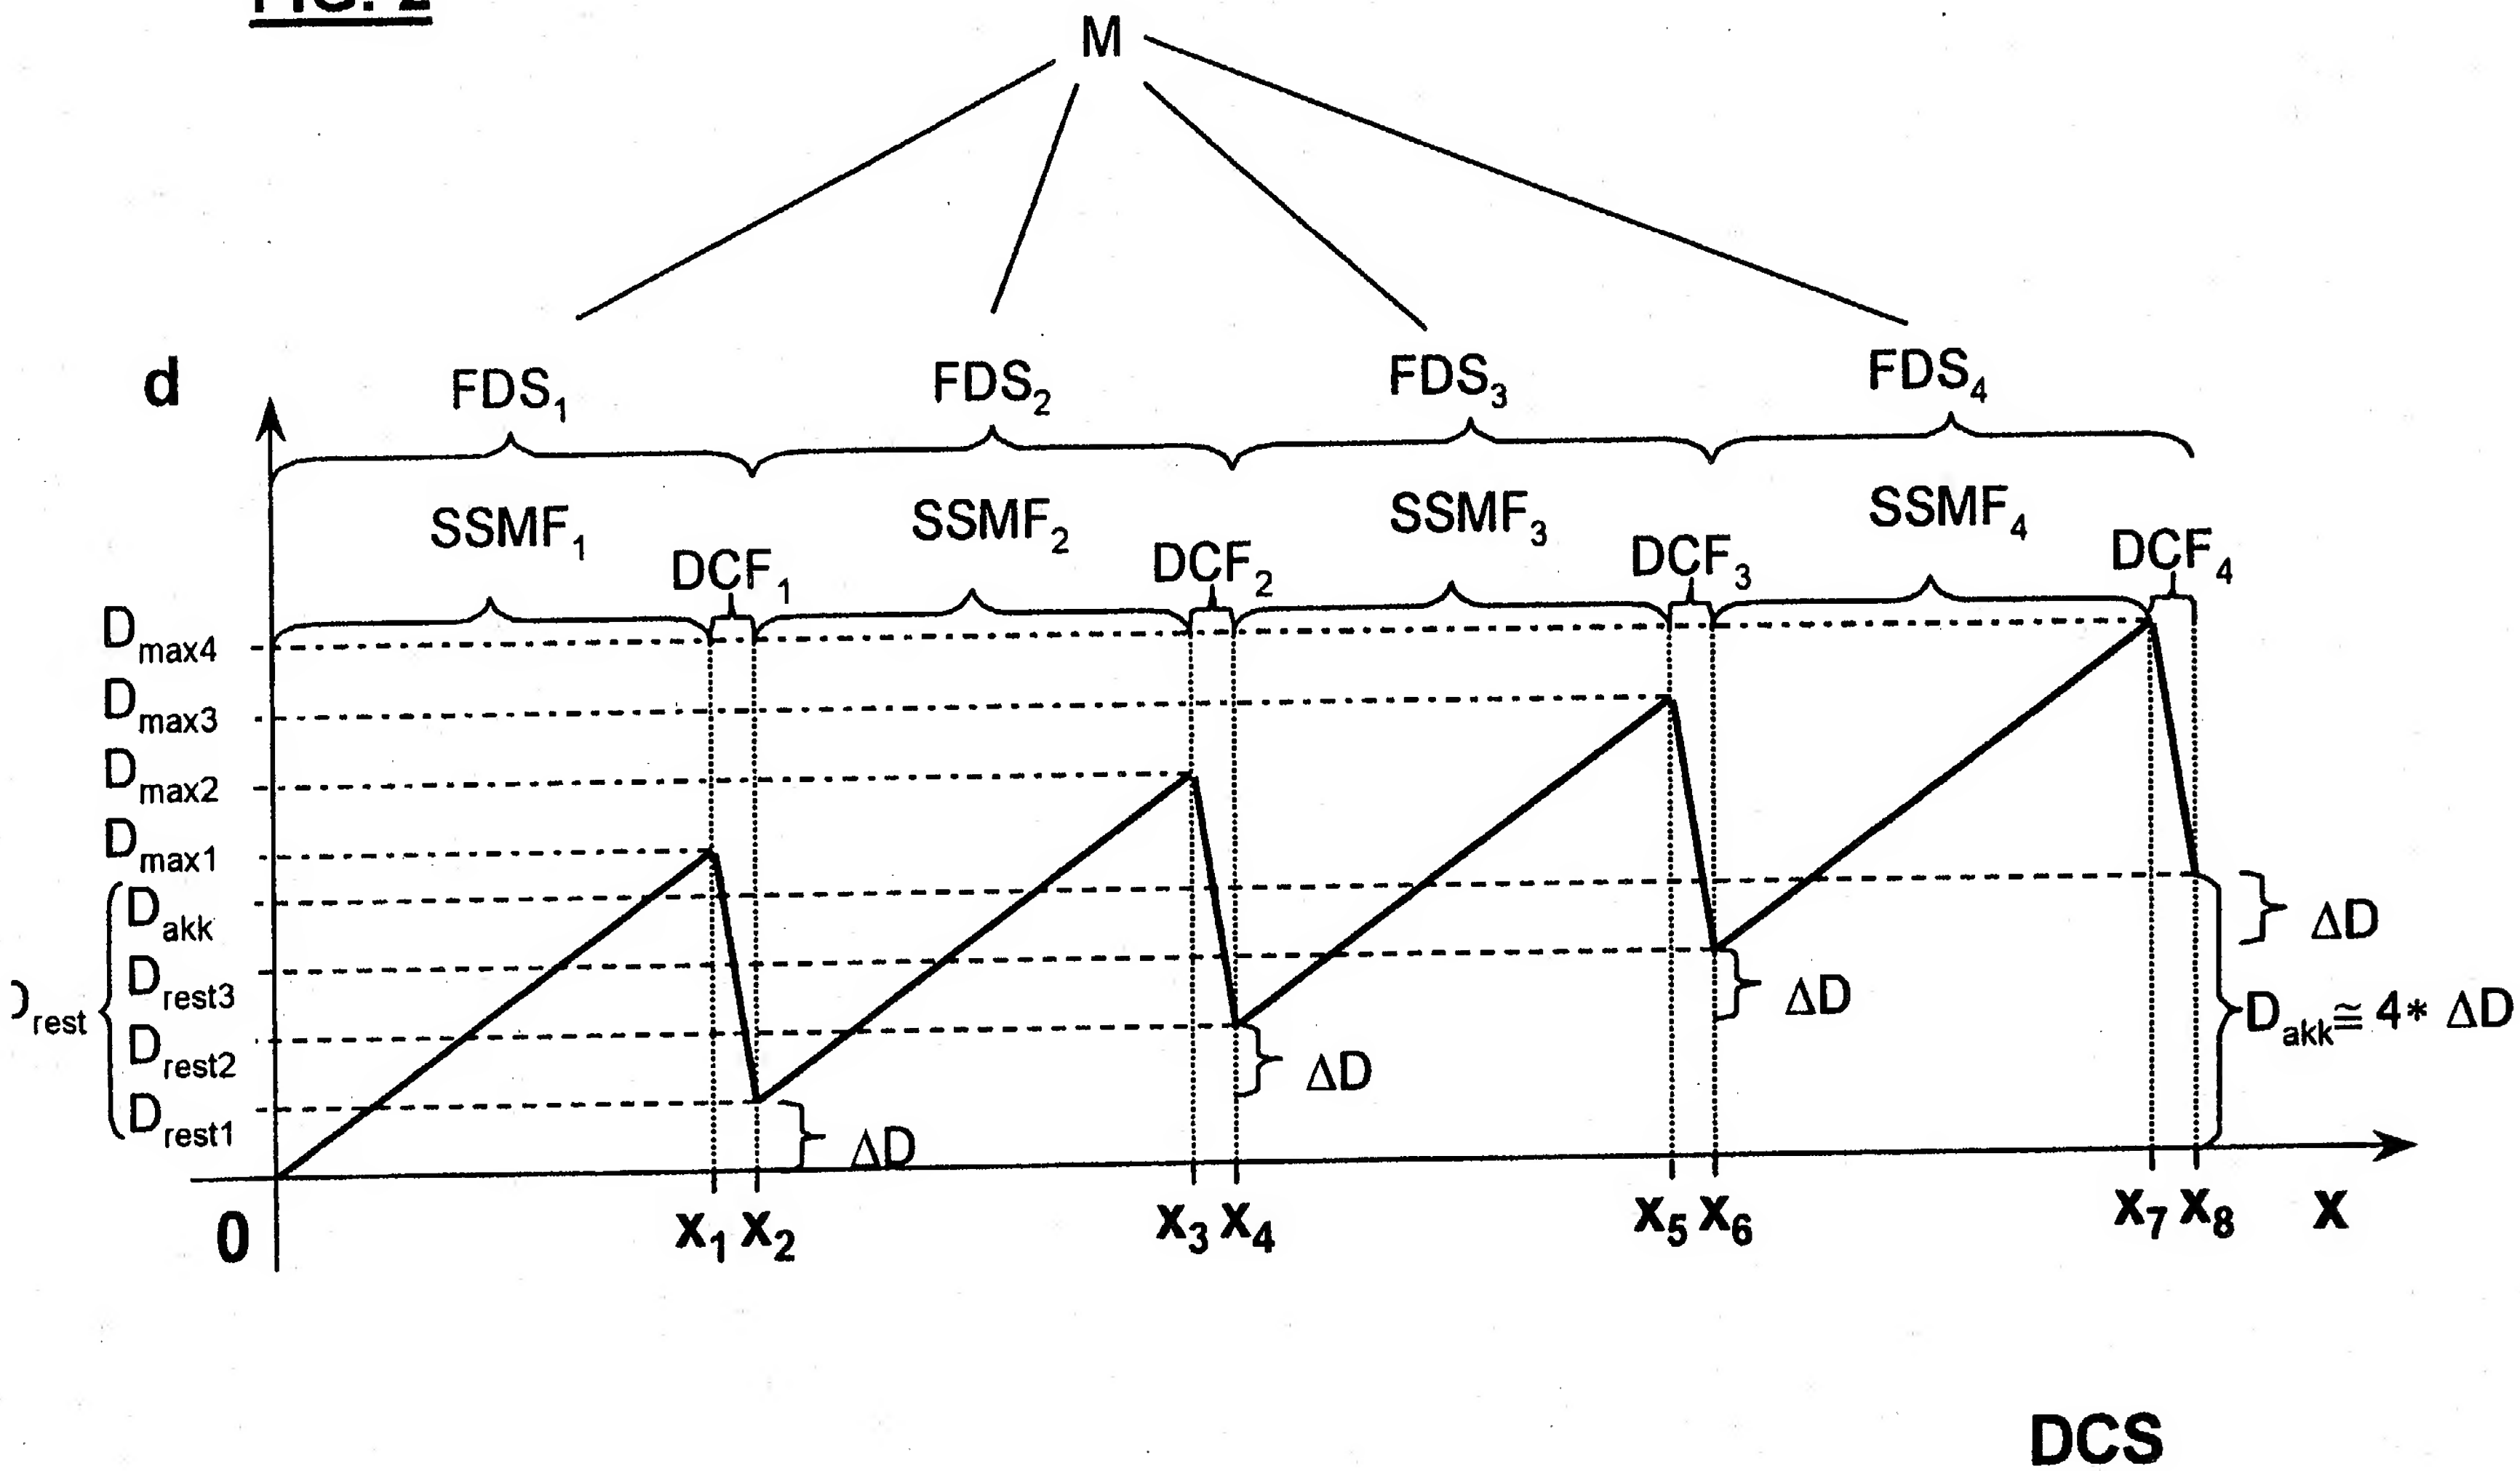

FIG. 3

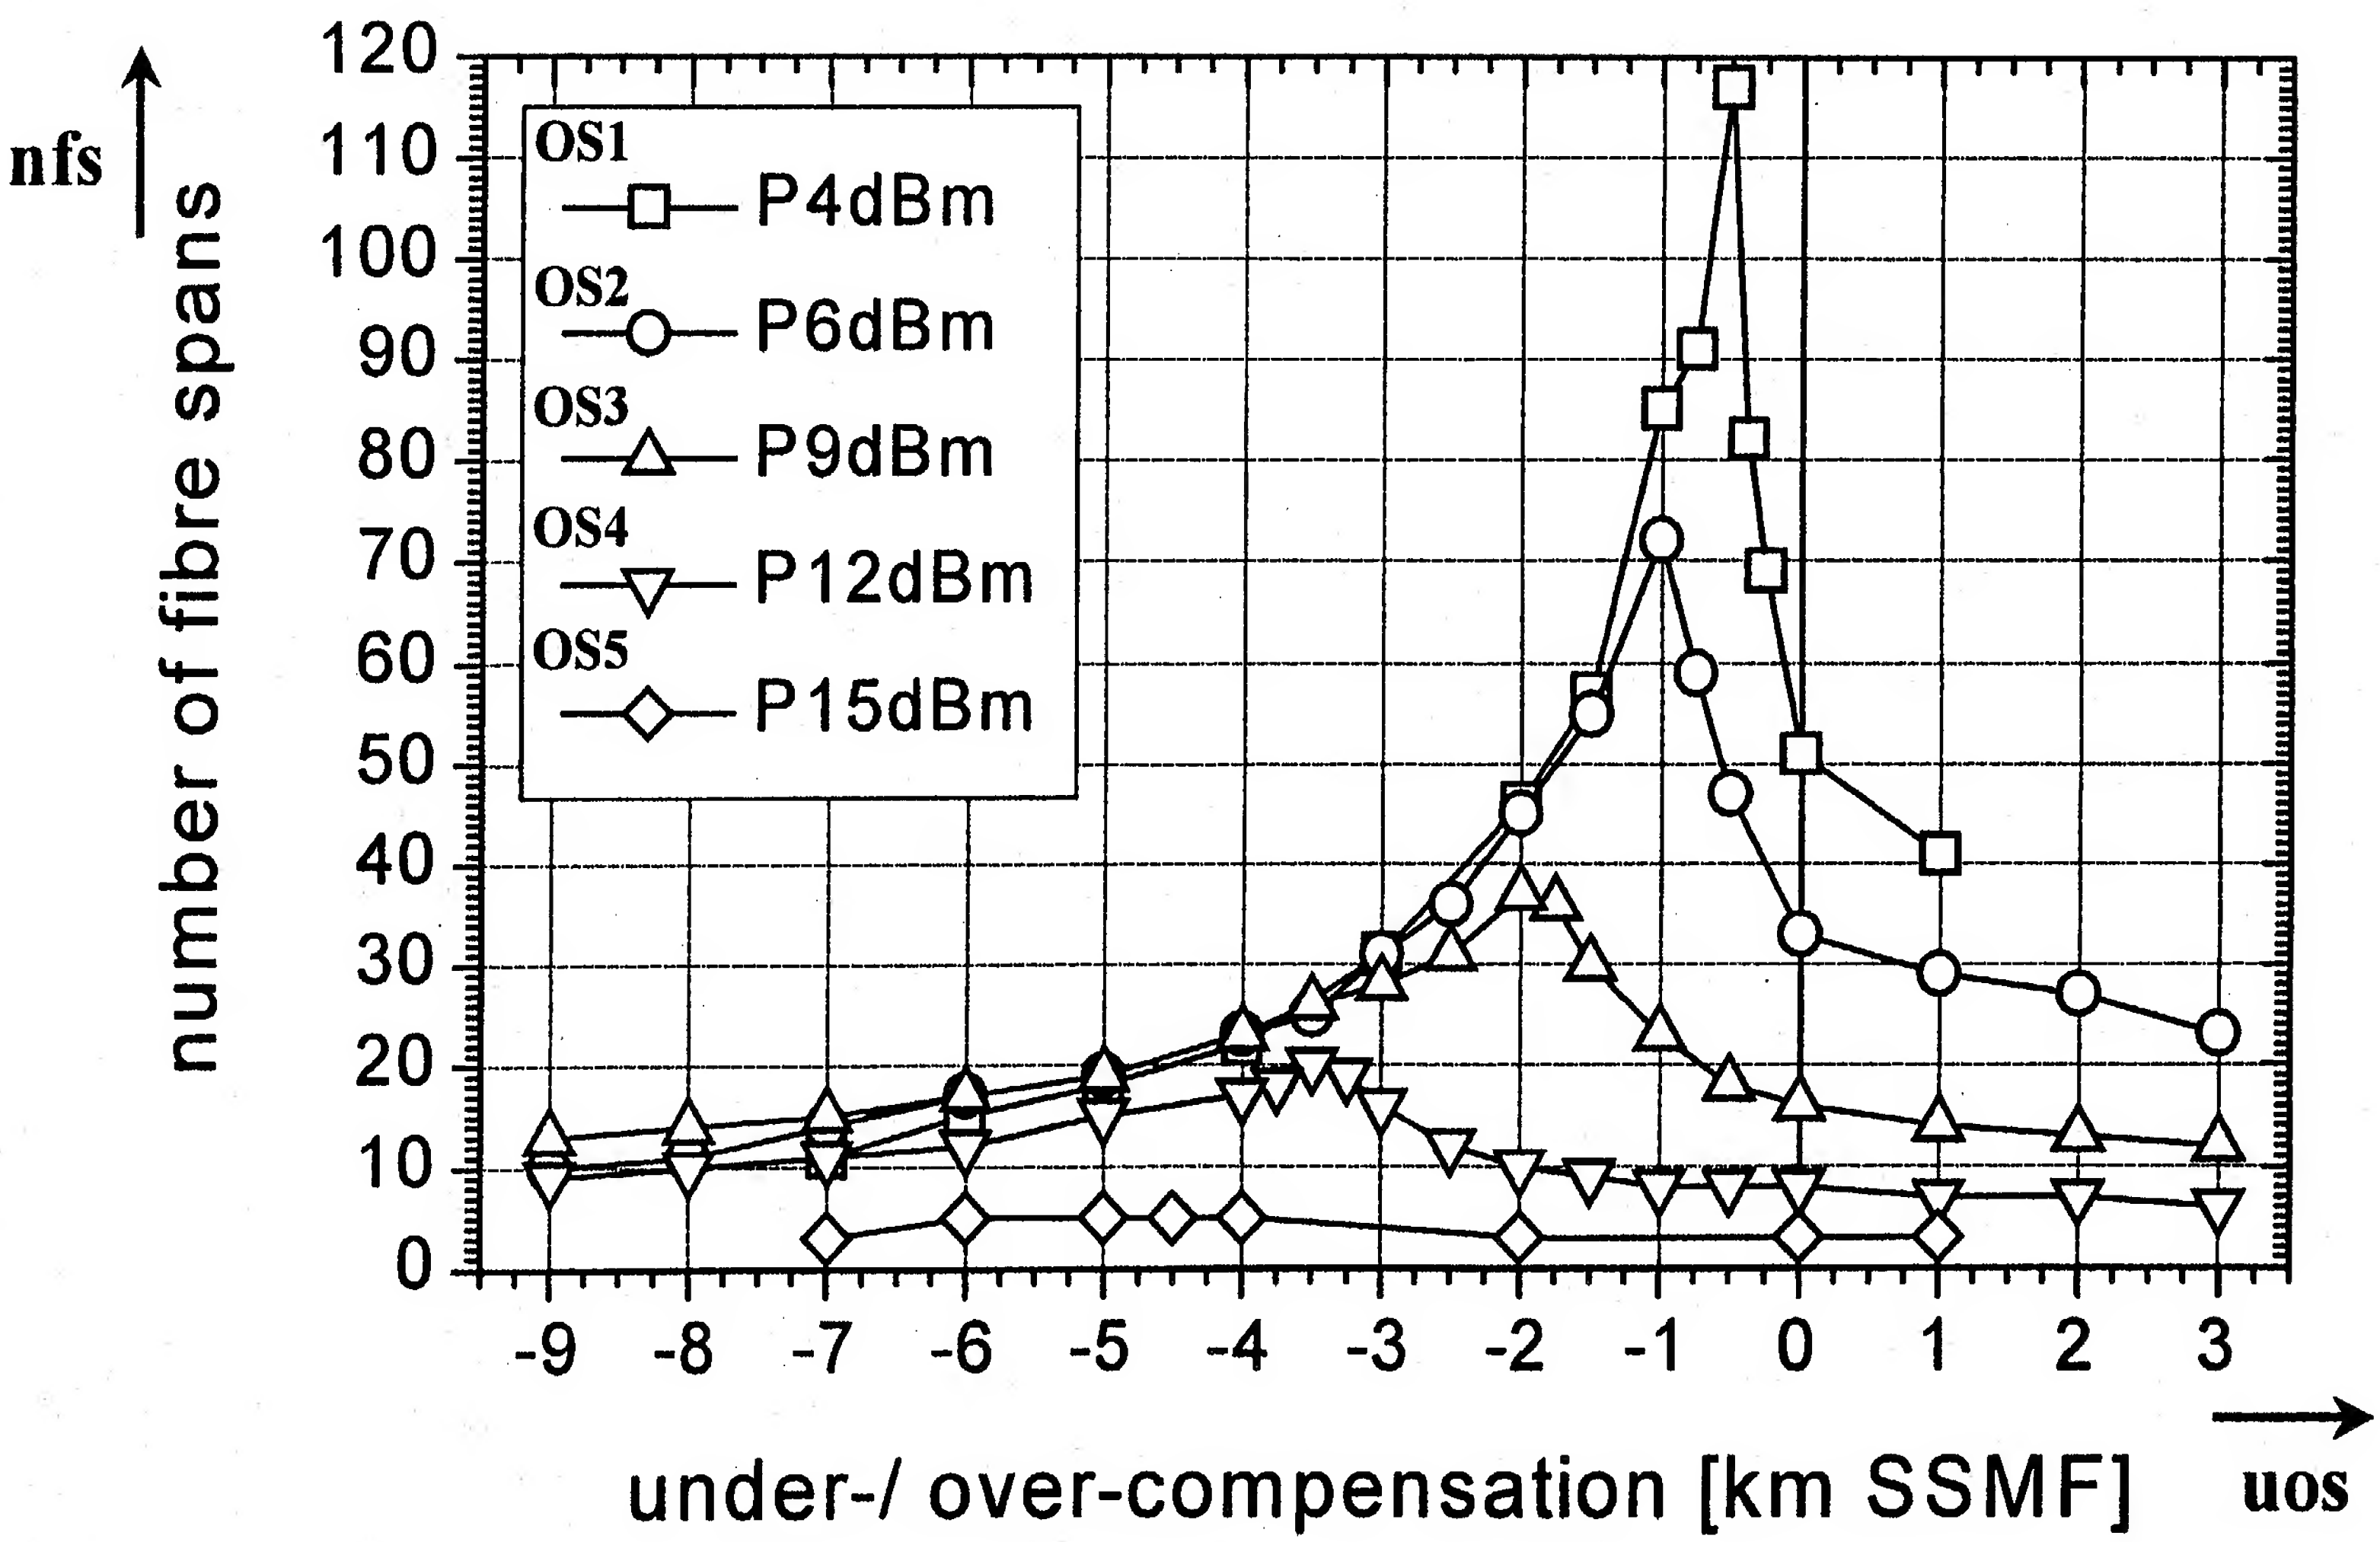
nfs
number of fibre spans
120
110
100
90
80
70
60
50
40
30
20
10
0
OS1
P4dBm
OS2
P6dBm
OS3
P9dBm
OS4
P12dBm
OS5
P15dBm
-9
-8
-7
-6
-5
-4
-3
-2
-1
0
1
2
3
under-/ over-compensation [km SSMF]
uos

Declaration and Power of Attorney For Patent Application

Erklärung Für Patentanmeldungen Mit Vollmacht

German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

As a below named inventor, I hereby declare that:

dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,

My residence, post office address and citizenship are as stated below next to my name,

dass ich, nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung mit dem Titel:

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Optisches Übertragungssystem mit Dispersionskompensationseinheiten

Optical transmission system with dispersion compensation units

deren Beschreibung

(zutreffendes ankreuzen)
☐ hier beigefügt ist.
☒ am 19.09.2000 als
PCT internationale Anmeldung
PCT Anmeldungsnummer PCT/DE00/03256
eingereicht wurde und am _______
abgeändert wurde (falls tatsächlich abgeändert).

the specification of which

(check one)
☐ is attached hereto.
☒ was filed on 19.09.2000 as
PCT international application
PCT Application No. PCT/DE00/03256
and was amended on ___________
(if applicable)

Ich bestätige hiermit, dass ich den Inhalt der obigen Patentanmeldung einschliesslich der Ansprüche durchgesehen und verstanden habe, die eventuell durch einen Zusatzantrag wie oben erwähnt abgeändert wurde.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above.

Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) von Wichtigkeit sind, an.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäss Abschnitt 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

German Language Declaration

Prior foreign appplications
Prioritãt beansprucht

Priority Claimed

19945143.5	DE	21.09.1999	☒ Yes	☐ No
(Number)	(Country)	(Day Month Year Filed)		
(Number) (Nummer)	(Country) (Land)	(Day Month Year Filed) (Tag Monat Jahr eingereicht)	☐ Yes Ja	☐ No Nein
(Number) (Nummer)	(Country) (Land)	(Day Month Year Filed) (Tag Monat Jahr eingereicht)	☐ Yes Ja	☐ No Nein

Ich beanspruche hiermit gemäss Absatz 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmeldungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozeßordnung der Vereinigten Staaten, Paragraph 122 offenbart ist, erkenne ich gemäss Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind.

I hereby claim the benefit under Title 35. United States Code. §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §122, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occured between the filing date of the prior application and the national or PCT international filing date of this application.

PCT/DE00/03256	19.09.2000	anhängig	pending
(Application Serial No.) (Anmeldeseriennummer)	(Filing Date D, M, Y) (Anmeldedatum T, M, J)	(Status) (patentiert, anhängig, aufgegeben)	(Status) (patented, pending, abandoned)
(Application Serial No.) (Anmeldeseriennummer)	(Filing Date D,M,Y) (Anmeldedatum T, M; J)	(Status) (patentiert, anhängig, aufgeben)	(Status) (patented, pending, abandoned)

Ich erkläre hiermit, dass alle von mir in der vorliegenden Erklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden koennen, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

German Language Declaration

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt: *(Name und Registrationsnummer anführen)*	POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

And I hereby appoint

Customer No. 26574

Telefongespräche bitte richten an: *(Name und Telefonnummer)*	Direct Telephone Calls to: *(name and telephone number)* Ext. ____________

Postanschrift: / Send Correspondence to:

Schiff, Hardin & Waite
6600 Sears Tower 60606-6473 Chicago, Illinois
Telephone: (001) 312 258 5780 and Facsimile (001) 312 258 5921
or
Customer No. 26574

1

Voller Name des einzigen oder ursprünglichen Erfinders: Dr. ANDREAS FAERBERT	Full name of sole or first inventor: Dr. ANDREAS FAERBERT
Unterschrift des Erfinders Datum 02/28/02	Inventor's signature Date
Wohnsitz MUENCHEN, DEUTSCHLAND DEX	Residence MUENCHEN, GERMANY
Staatsangehörigkeit DE	Citizenship DE
Postanschrift Damaschkestr. 64 b	Post Office Addess Damaschkestr. 64 b
81825 MUENCHEN	81825 MUENCHEN

2

Voller Name des zweiten Miterfinders (falls zutreffend): Dr. CHRISTIAN SCHEERER	Full name of second joint inventor, if any: Dr. CHRISTIAN SCHEERER
Unterschrift des Erfinders Datum 10 Feb 02	Second Inventor's signature Date
Wohnsitz Ottawa, Ontario K1S 2S4, KANADA CAX	Residence Ottawa, Ontario K1S 2S4, CANADA
Staatsangehörigkeit DE	Citizenship DE
Postanschrift 46 Ella Street	Post Office Address 46 Ella Street
CDN- Ottawa, Ontario K1S 2S4 KANADA	CDN- Ottawa, Ontario K1S 2S4 CANADA

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).

Form PTO-FB-240 (8-83) Patent and Trademark Office-U.S. Department of COMMERCE